




STS 7527-18


Experts in the field



Outline Dimensions

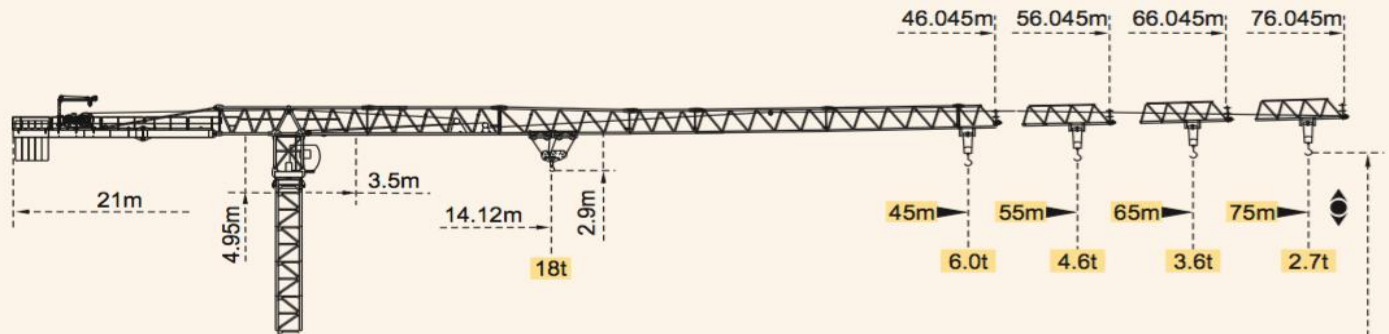

Mast

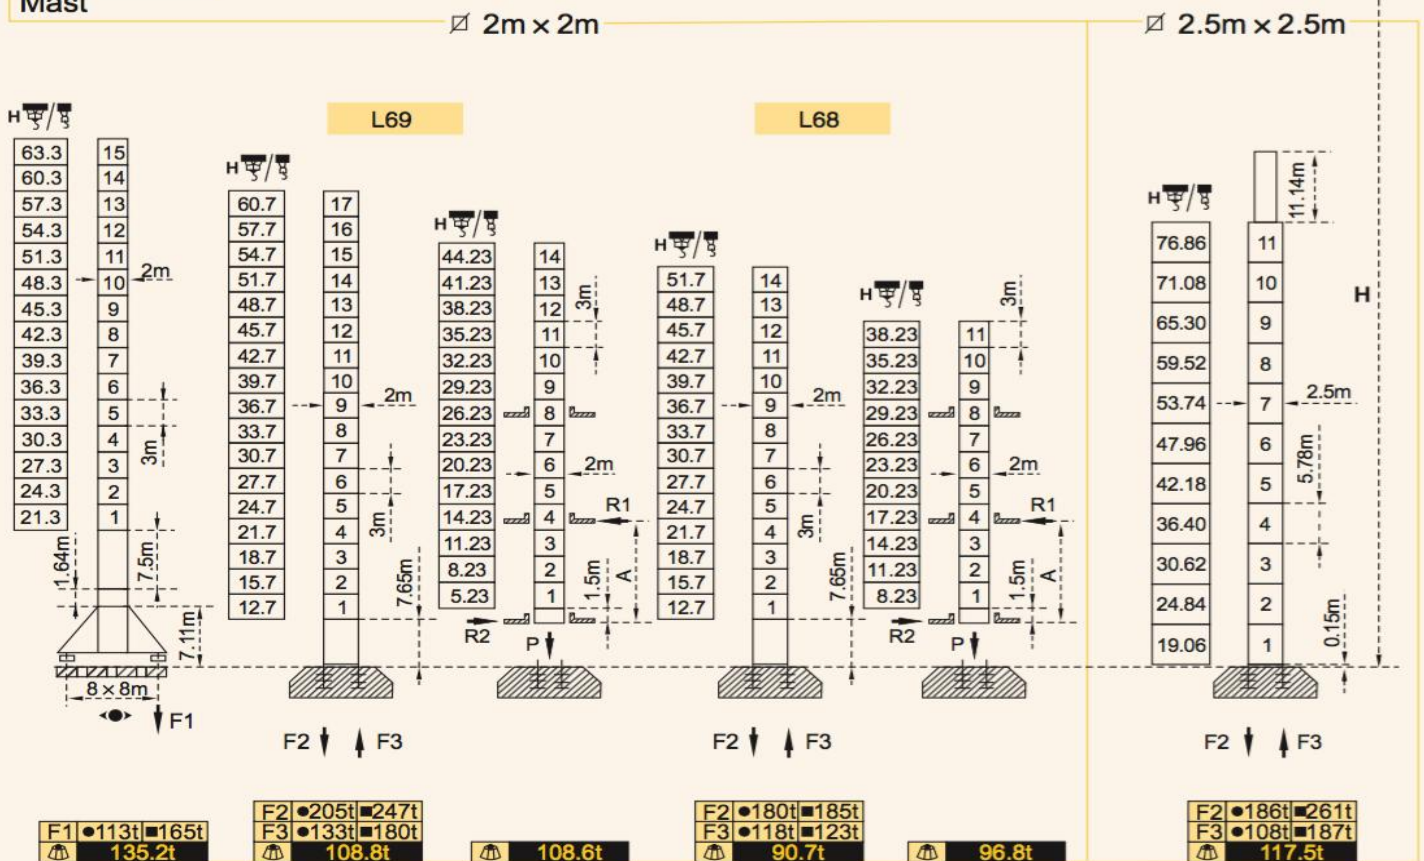

Note: All types of mast can be configured with rail-traveling tower crane

● in service









■ out of service

Without load and ballast with longest jib and maximum height

F = Reactions

Load diagrams

Jib



Standard trolley 2/4 fall (when using subtract 0.76t from the loads)

Specifications Mechanisms

Mechanisms	Motor Type	Speeds m/min		Capacity t.	Rope Lenght	Motor kW
Hoisting	120LVF45F 	2 fall	0-40	9	1000m >1000m★	90
			0-80	4.5		
		4 fall	0-20	18		
			0-40	9		
	122LVF45A 	2 fall	0-44	9	650m >650m★	90
			0-88	4.5		
		4 fall	0-22	18		
			0-44	9		
Trolleying	X185L 	15-30-60				185N.m
	12DCV 	0-60				9
Slewing	RCV185E 	0-0.7r/min				2 x 185N.m
	24RVF 	0-0.7r/min				2 x 9
Travelling	RT443 	0-12.5-25				4 x 1.7/3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally binding.
For any technical information, please refer to
the corresponding instructions.

