




STS 5510-6

Experts in the field




Outline Dimensions

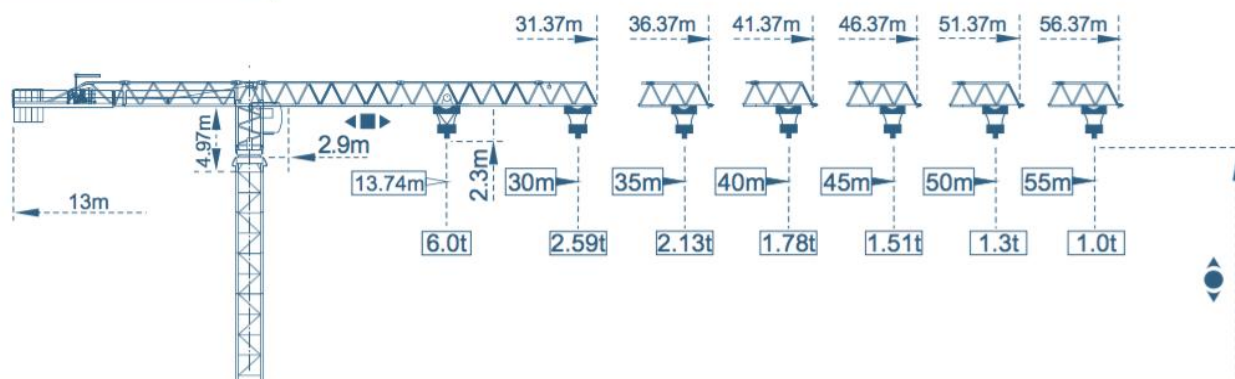

Mast $\square 1.4\text{m} \times 1.4\text{m}$

$\square 1.6\text{m} \times 1.6\text{m}$

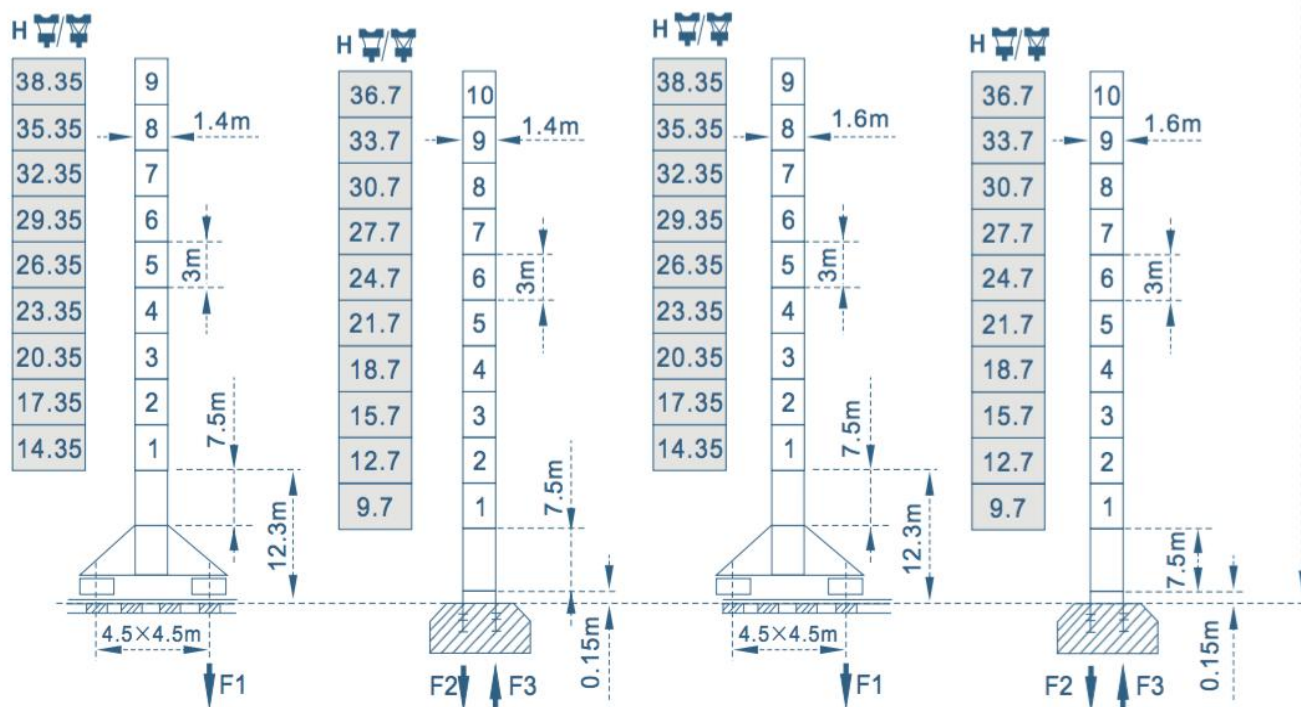





F = Reactions

Specific parameters, see the product manual

* Independent height increased to consult us

Load diagrams



Jib



Standard trolley 2/4 fall (when using  subtract 0.1t from the loads )

Inner climbing $\nabla 1.4\text{m} \times 1.4\text{m}$

1.6m × 1.6m

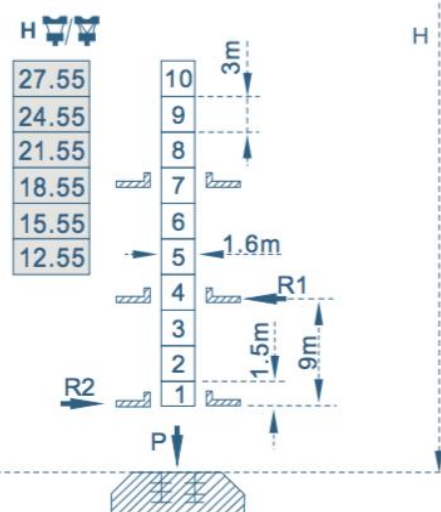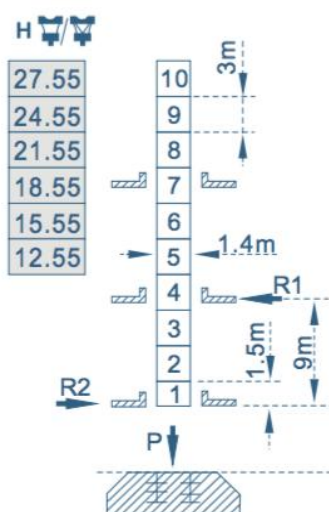

Specifications Mechanisms					
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght
Hoisting	33RPC15 	2 fall	0-40	3	490m >490m ★
			0-80	1.5	
		4 fall	0-20	6	
			0-40	3	
	33LVF15 	2 fall	0-40	3	490m >490m ★
			0-80	1.5	
		4 fall	0-20	6	
			0-40	3	
Trolleying	X55L	◀■▶	15-38-58		55N.m
	4D2V4	◀■▶	20/40		2.2/3.3
	4DCV	◀■▶	0-58		3.3
Slewing	OMD45	⦿	0-0.7r/min		2 4.4
	3RH	⦿	0-0.7r/min		2 2.2
	RCV95	⦿	0-0.7r/min		2 95N.m
Travelling	RT443	◀●▶	0-12.5-25		4 1.7/3.4
	18TVF	◀●▶	0-25		4 3.4

★ To be supplied upon per client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

