




STT 5513-6




Experts in the field



Outline Dimensions

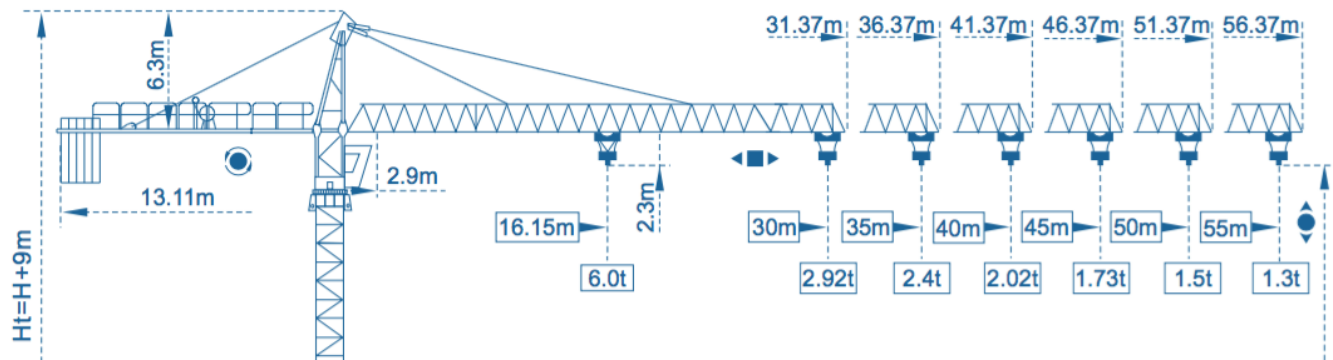

Mast $\nabla 2m \times 2m$

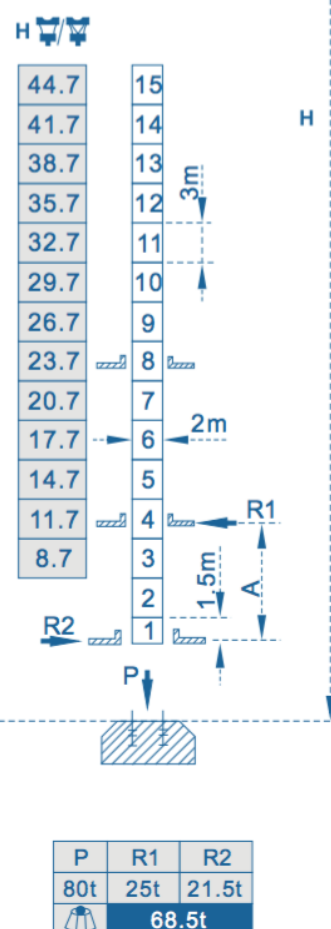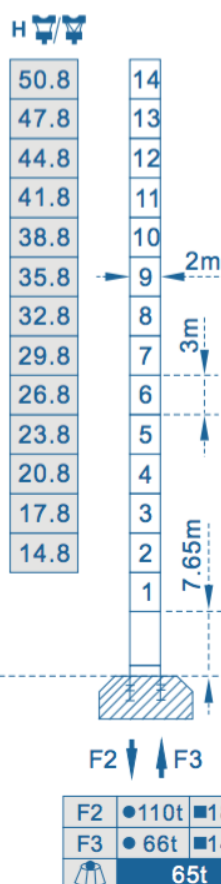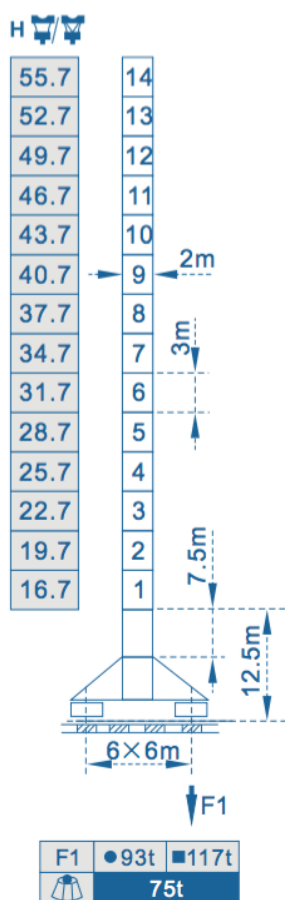


● In service
 ■ Out of service
 Without load and ballast with longest jib and maximum height


F= Reactions

Jib

Load diagrams

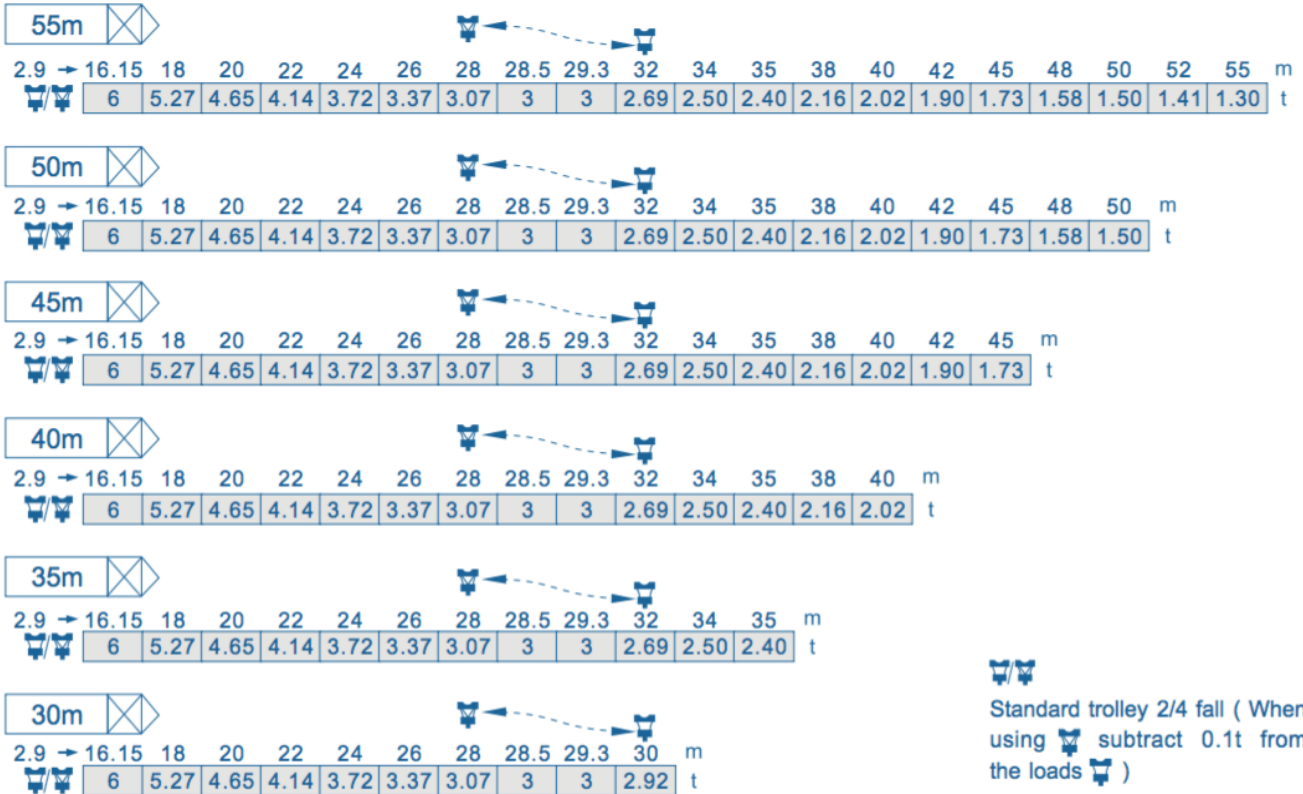

Mast 1.6m × 1.6m

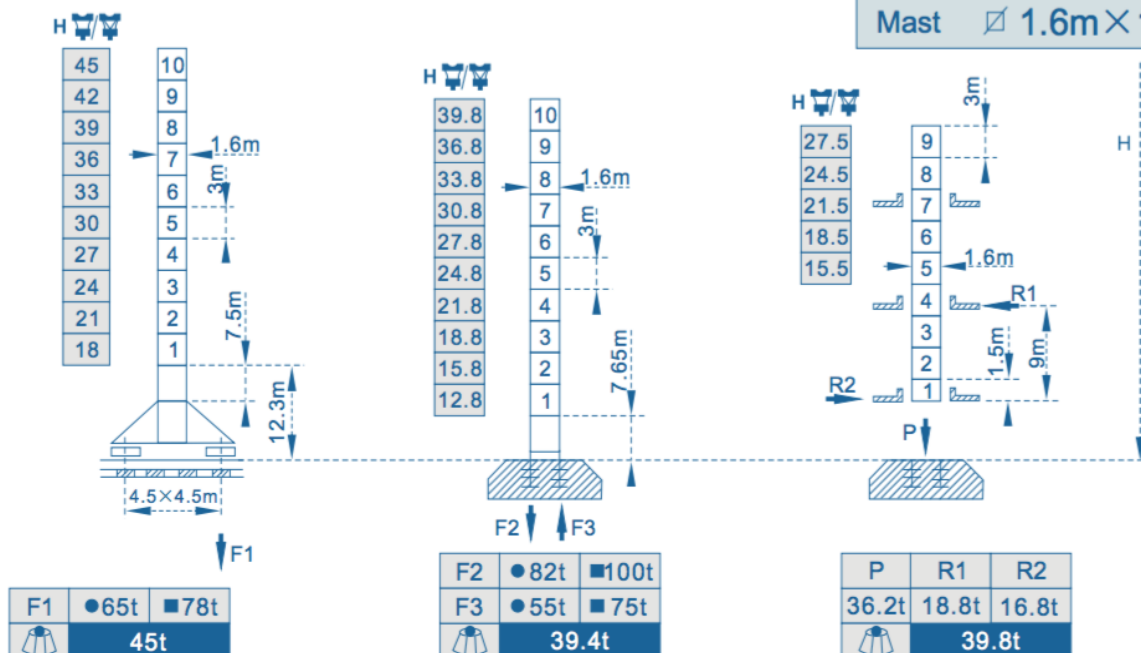

Specifications Mechanisms					
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght
Hoisting	33LVF15B ⬆️⬆️	2 fall	0-40	3	500m >500m★
			0-80	1.5	
		4 fall	0-20	6	
			0-40	3	
	33RPC15D ⬆️⬆️	2 fall	0-40	3	500m >500m★
			0-80	1.5	
		4 fall	0-20	6	
			0-40	3	
Trolleying	XD55L ⬅️⬆️➡️	0-58			55N.m
	4D2V4 ⬅️⬆️➡️	20/40			2.2/3.3
	4DCV ⬅️⬆️➡️	0-58			3.3
Slewing	OMD45 ⦿	0-0.7r/min			2×4.4
	RCV95 ⦿	0-0.7r/min			2×95N.m
Travelling	RT443 ⬅️⦿➡️	0-12.5-25			4×1.7/3.4
	18TVF ⬅️⦿➡️	0-25			4×3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

