




STT 6013-6

Experts in the field




Outline Dimensions

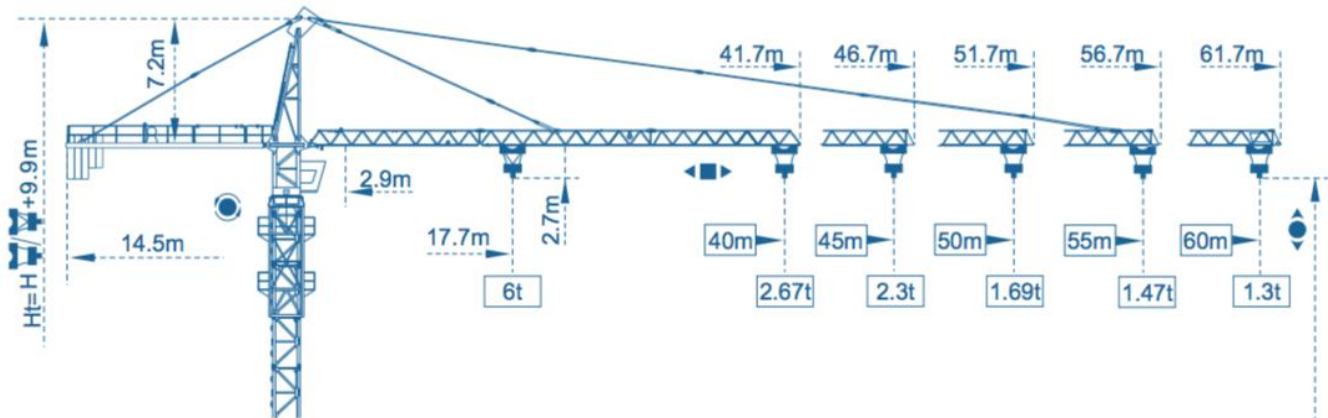

Mast $\varnothing 1.6\text{m} \times 1.6\text{m}$

$\varnothing 2\text{m} \times 2\text{m}$

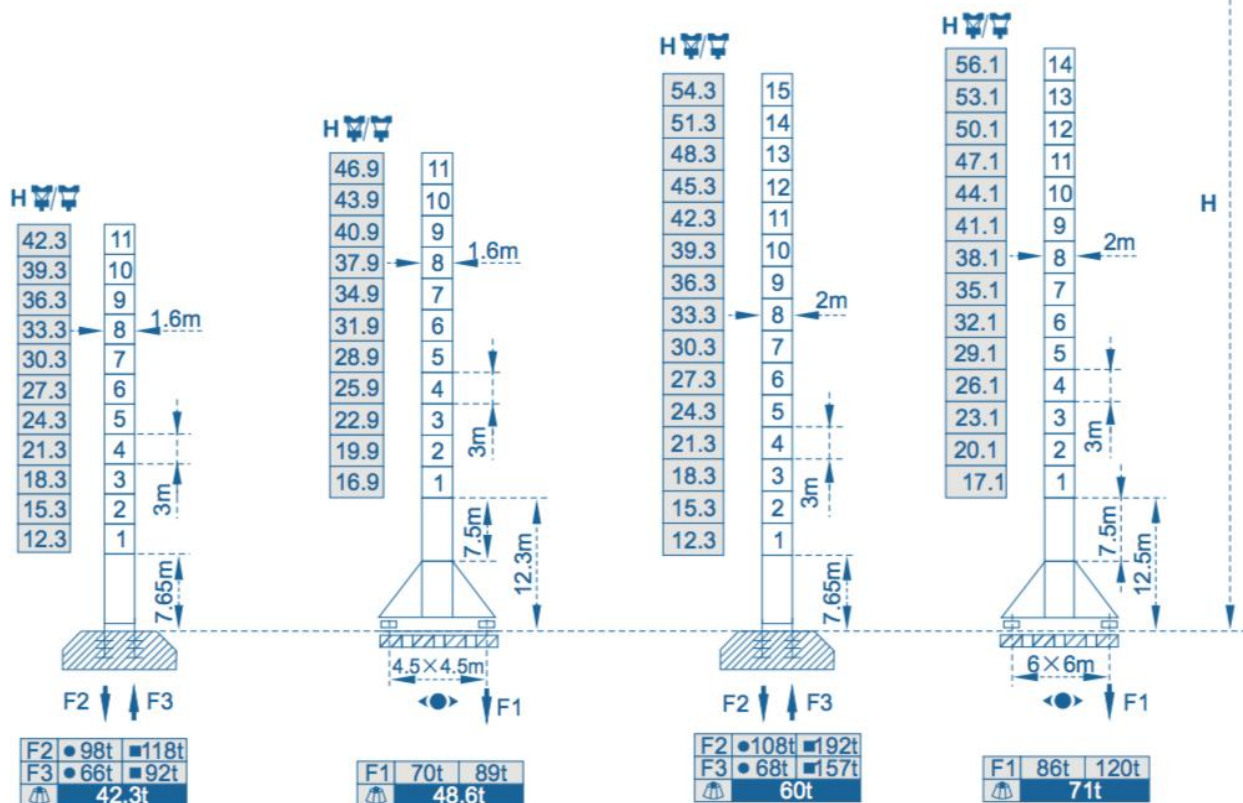


● in service
 ■ out of service
 Without load and ballast with longest jib and maximum height


F = Reactions

Load diagrams

Jib

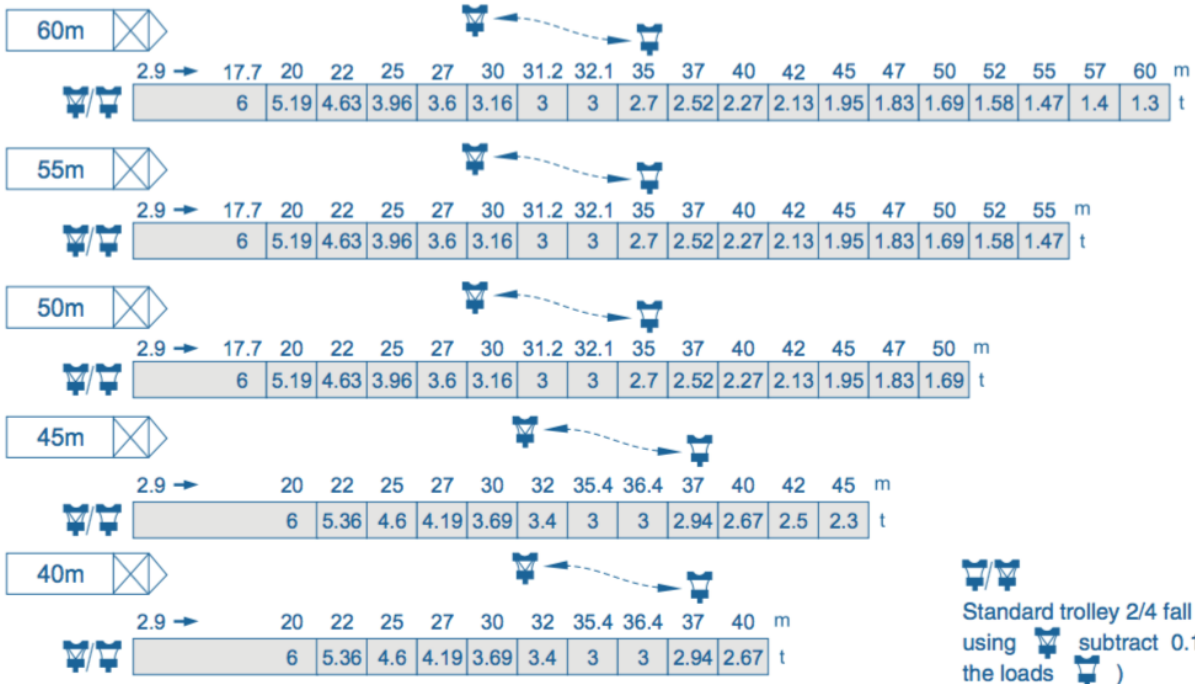

Inner climbing

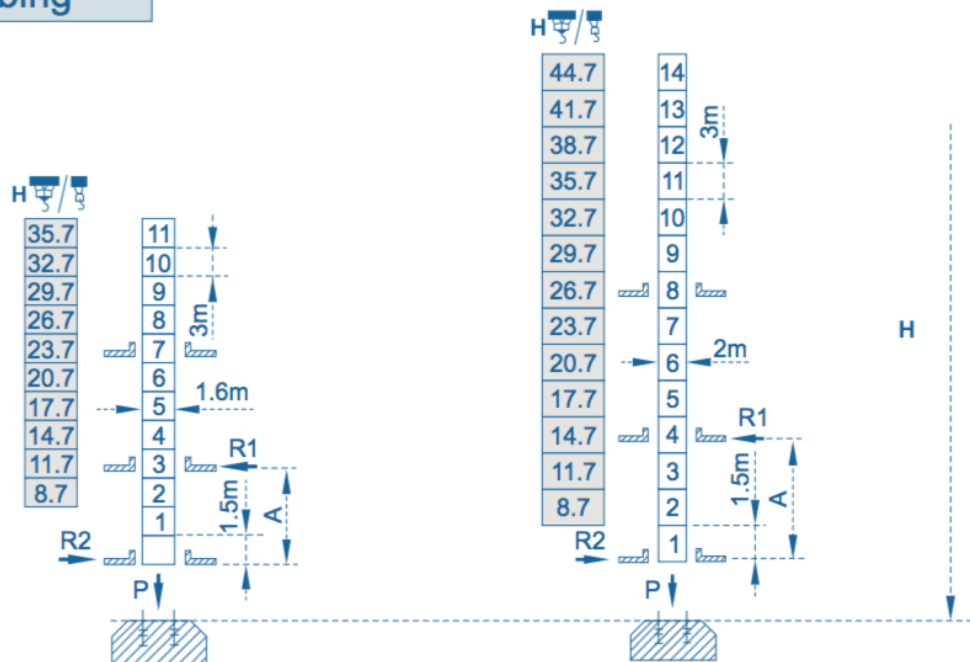

Specifications Mechanisms						
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght	Motor kW
Hoisting	33RPC15D 	2 fall	0-40	3	500m >500m★	24
			0-80	1.5		
		4 fall	0-20	6		
			0-40	3		
	33LVF15B 	2 fall	0-40	3	500m >500m★	24
			0-80	1.5		
		4 fall	0-20	6		
			0-40	3		
Trolleying	XD55L 	15-38-58				55N.m
	4DCV 	0-58				3.3
Slewing	OMD45 	0-0.7r/min				2×4.4
	RCV95 	0-0.7r/min				2×95N.m
Travelling	RT443 	0-12.5-25				4×1.7/3.4
	18TVF 	0-25				4×3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

