



STT 7022-16


Experts in the field



S&Q MART
SAFETY & QUALITY




Outline Dimensions

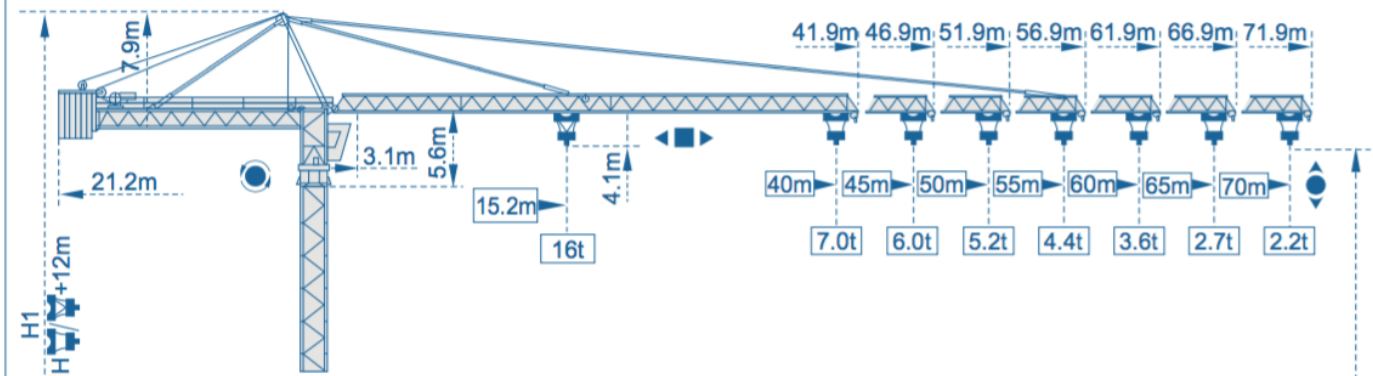


Mast 2m x 2m

2.5m x 2.5m

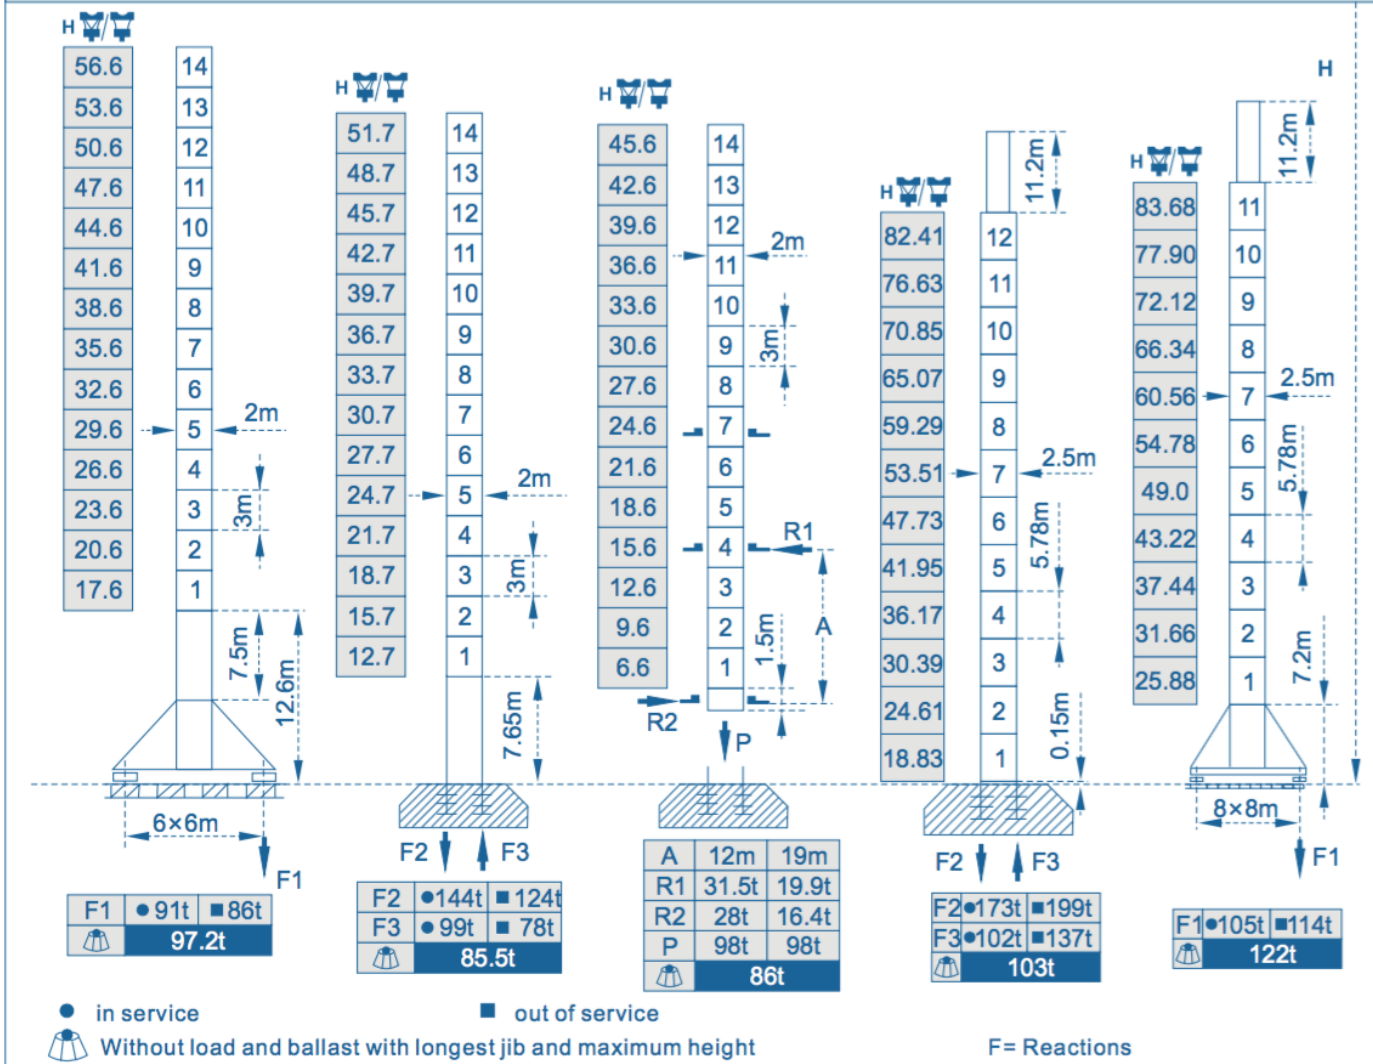

Load diagrams

Jib

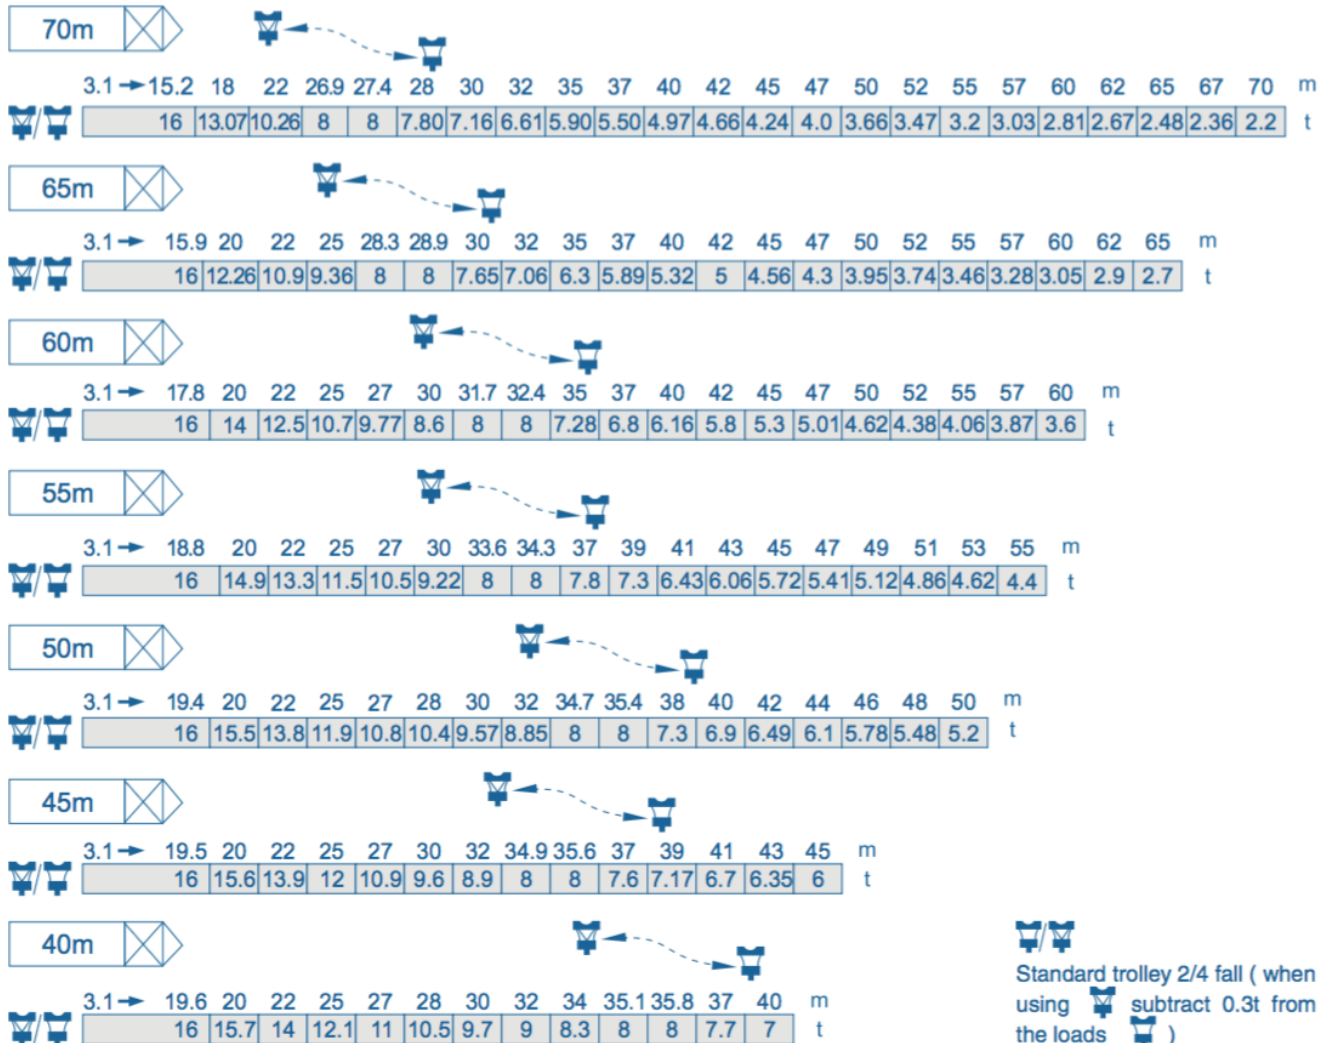

Specifications Mechanisms					
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght
Hoisting	75LVF40R ⬆️⬆️	2 fall	0-30	8	600m >600m ★
			0-60	4	
		4 fall	0-15	16	
			0-30	8	
	102LVF40F ⬆️⬆️	2 fall	0-40	8	700m >700m ★
			0-80	4	
		4 fall	0-20	16	
			0-40	8	
	120LVF40F ⬆️⬆️	2 fall	0-48	8	590m >590m ★
			0-96	4	
		4 fall	0-24	16	
			0-48	8	
	70RCS40 ⬆️⬆️	2 fall	0-30	8	600m >600m ★
			0-60	4	
		4 fall	0-15	16	
			0-30	8	
Trolleying	XD120K ⬅️➡️	0-40			120N.m
	7DCV ⬅️➡️	0-43			5.5
	8DVF ⬅️➡️	0-44			120N.m
Slewing	OMD85 ⬆️	0-0.7 r/min			2×9
	RCV185B ⬆️	0-0.7 r/min			2×185N.m
	RCV185E ⬆️	0-0.7 r/min			2×185N.m
	24RVF ⬆️	0-0.7 r/min			2×9
Travelling	RT443 ⬅️➡️	0-12.5-25			4×1.7/3.4
	18TVF ⬅️➡️	0-25			4×3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally binding.
For any technical information, please refer to
the corresponding instructions.

