






SLG 6050-20

Experts in the field

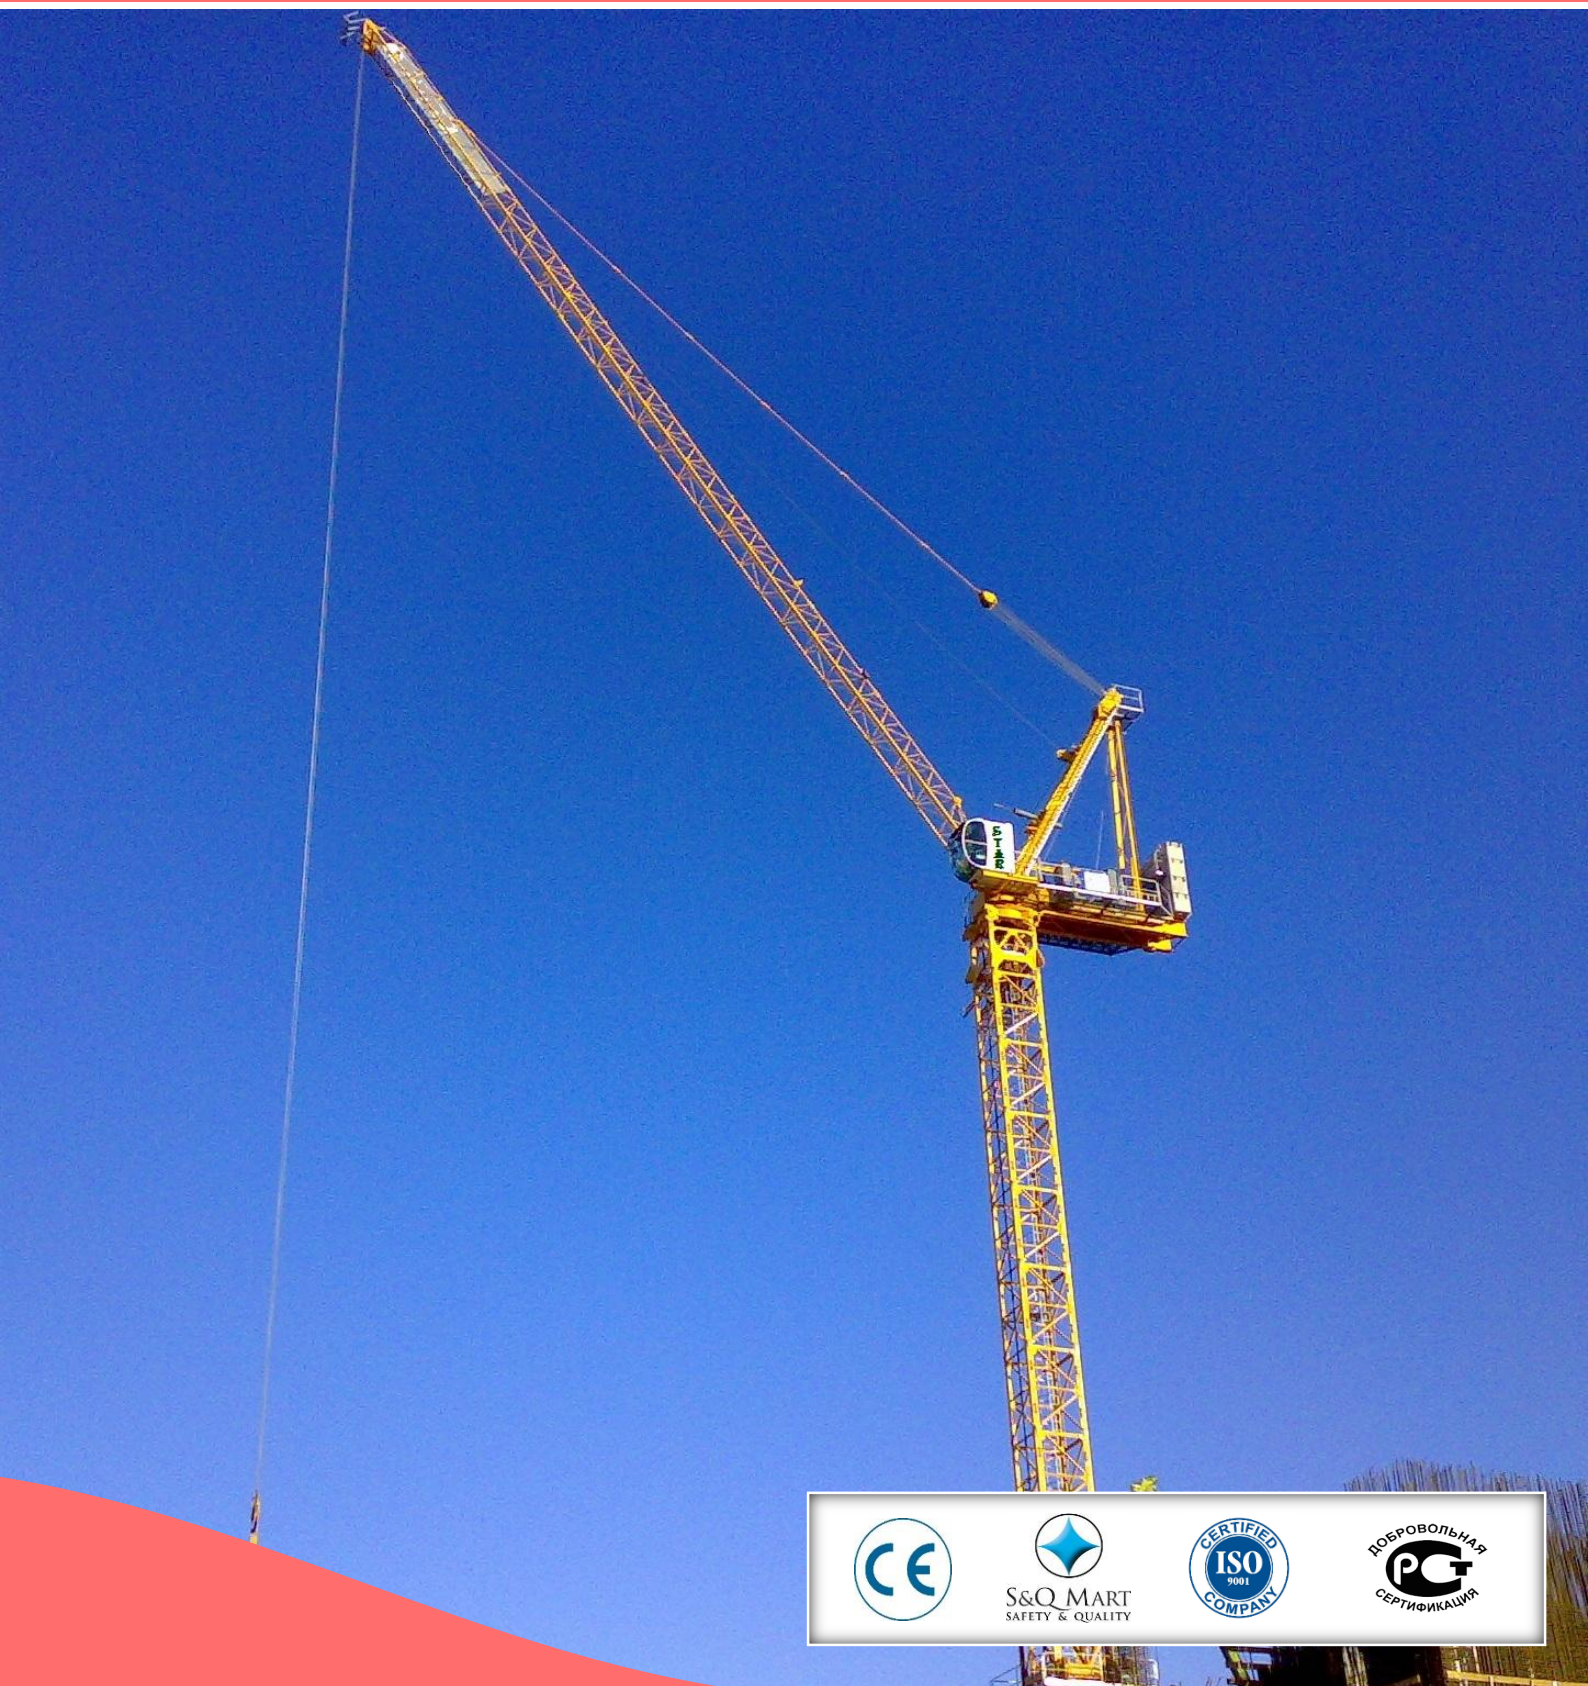

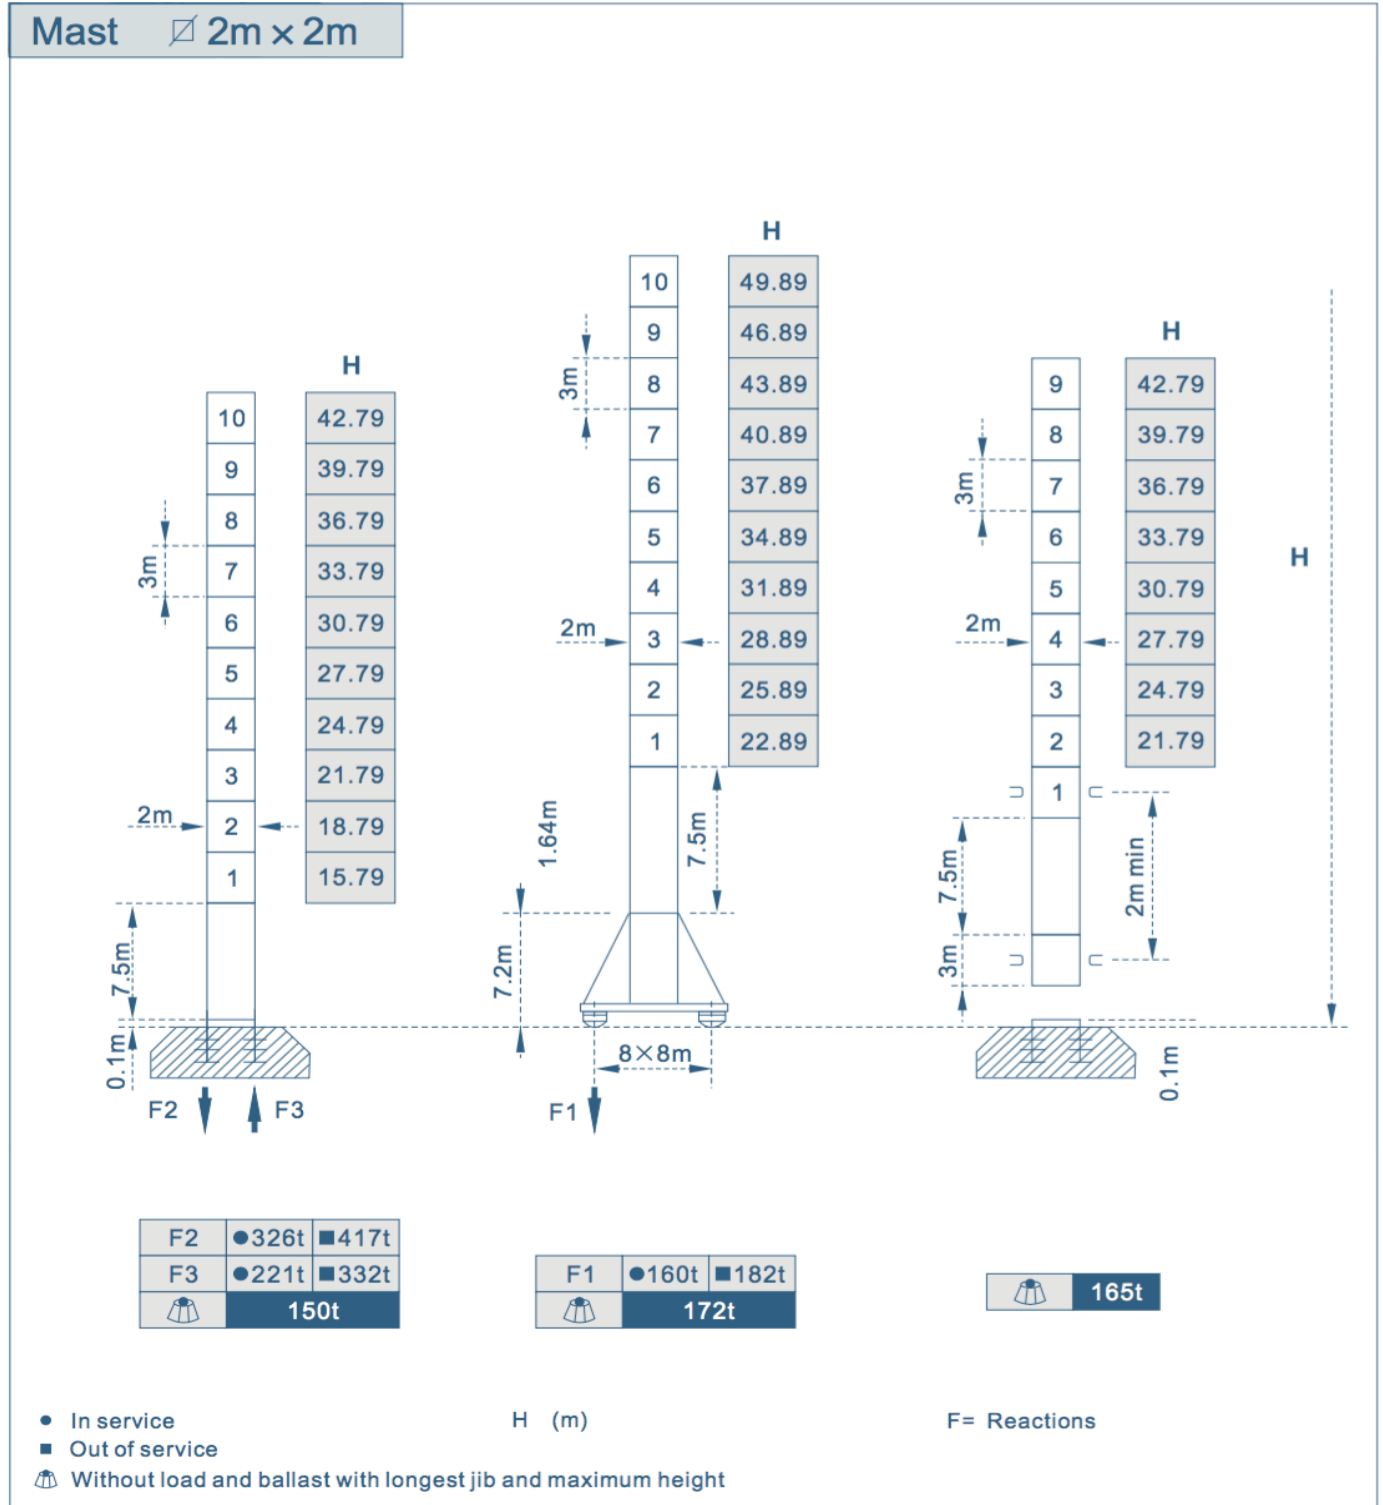

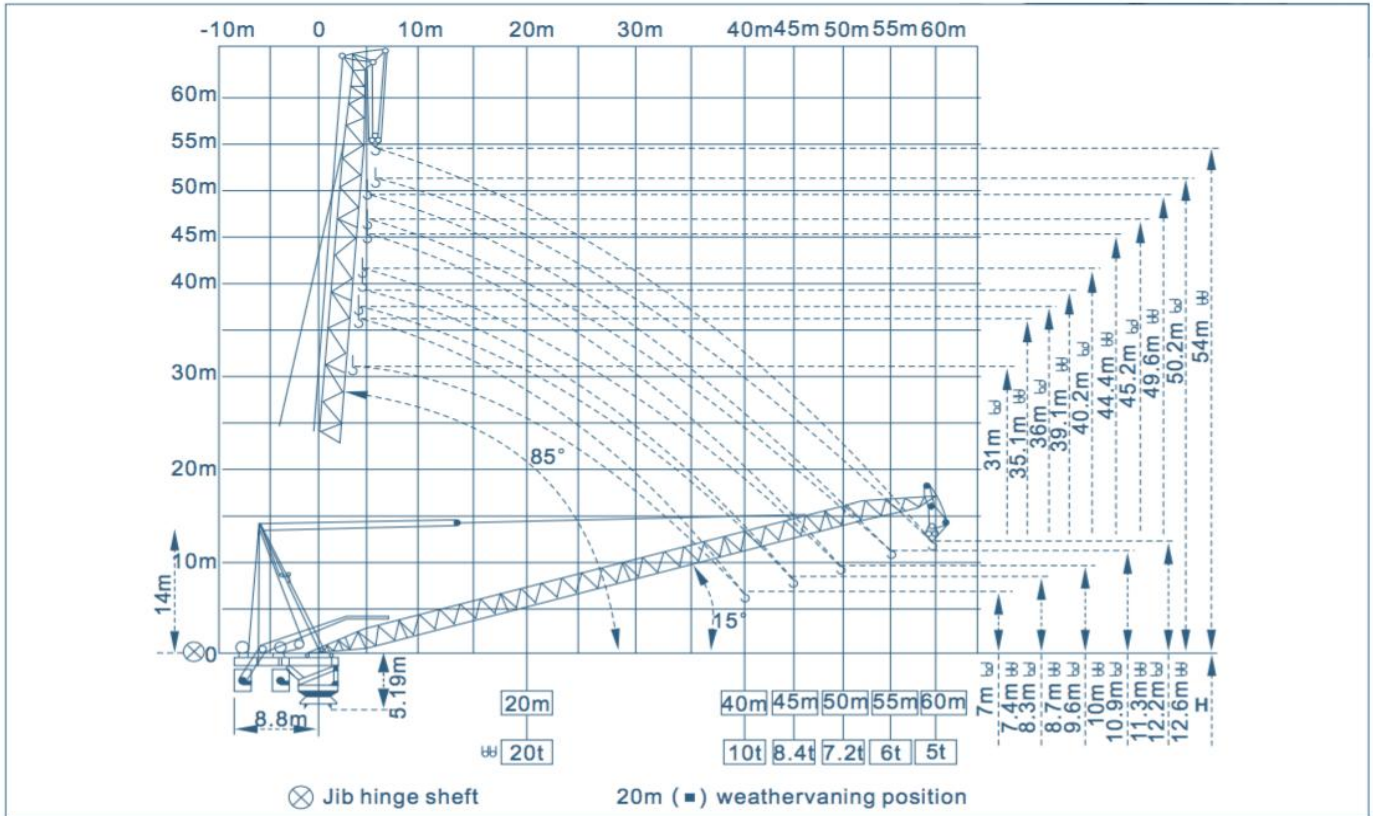

Jib

Load diagrams

Jib Length	Reach (m)	Load Capacity (t)	
60m	5.5	20	
	20	17.5	
	23	16	
	25	14.7	
	27	12.9	
	30	11.8	
	32	10.3	
	35	10	
	35.6	10	
	36.3	9.8	
	37	9	
	40	8.4	
	42	7.7	
	45	7.2	
	47	6.6	
	50	6.2	
52	5.7		
55	5.4		
57	5		
60			
55m	5	20	
	20.4	18	
	23	16.6	
	25	15.3	
	27	13.4	
	30	12.2	
	32	10.6	
	35	10	
	36.2	10	
	37	9.1	
	40	8.6	
	42	7.9	
	45	7.5	
	47	6.9	
	50	6.5	
	52	6	
55			
50m	5	20	
	20.8	18.3	
	23	17	
	25	15.6	
	27	13.8	
	30	12.6	
	32	10.9	
	35	10	
	36.7	10	
	37.5	9.3	
	40	8.8	
	42	8.2	
	45	7.8	
	47	7.2	
	50		
	45m	4.5	20
21.2		18.6	
23		17.3	
25		16	
27		14.1	
30		12.9	
32		11.2	
35		10	
36.7		10	
37.5		9.5	
40		9	
42		8.4	
45			
40m		4	20
		21.2	18.9
		23	17.5
	25	16.2	
	27	14.4	
	30	13.4	
	32	12	
	35	10.9	
	37	10	
	40		

Specifications Mechanisms						
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght	Motor kW
Hoisting	150LVF50 ⬆️⬆️	2 fall	0-46	10	900m >900m ★	110
			0-82	5		
			0-92	2.5		
		4 fall	0-23	20		
			0-41	10		
			0-46	5		
	120LVF50F ⬆️⬆️	2 fall	0-39	10	520m >520m ★	90
			0-78	5		
4 fall		0-19.5	20			
		0-39	10			
Trolleying	85BWZA55 ⬆️	≤3.5min			63	
Slewing	RCV185 ⬆️	0-0.7r/min			3×185N.m	
	37RVF ⬆️	0-0.7r/min			3×9	
Travelling	RT643 ⬆️⬆️	0-16-32			6×2.6/5.2	
	42TVF ⬆️⬆️	0-32			6×5.2	

★ To be supplied according to client's specific requirements
Subject to modithcation

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

