




STS 6015-6

Experts in the field



Outline Dimensions


P6015(6t)

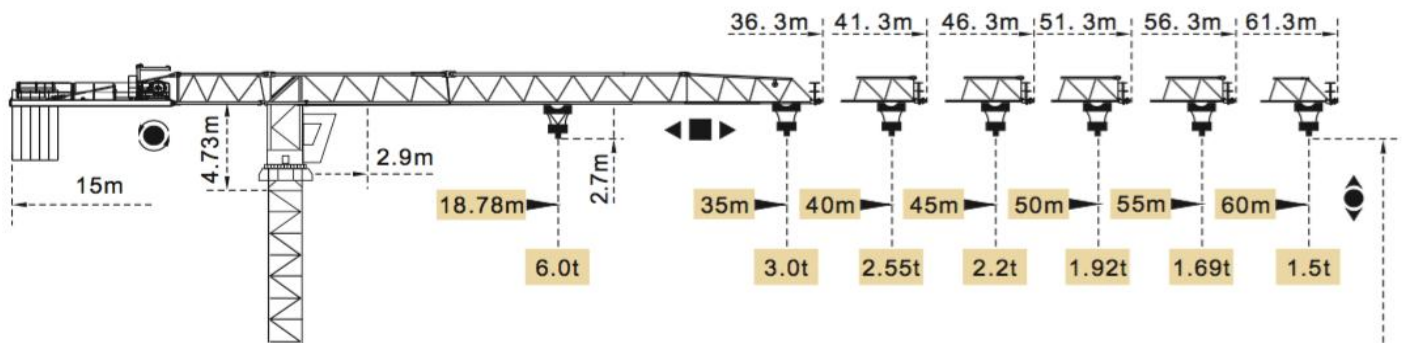

Mast

1.6m x 1.6m

2m x 2m






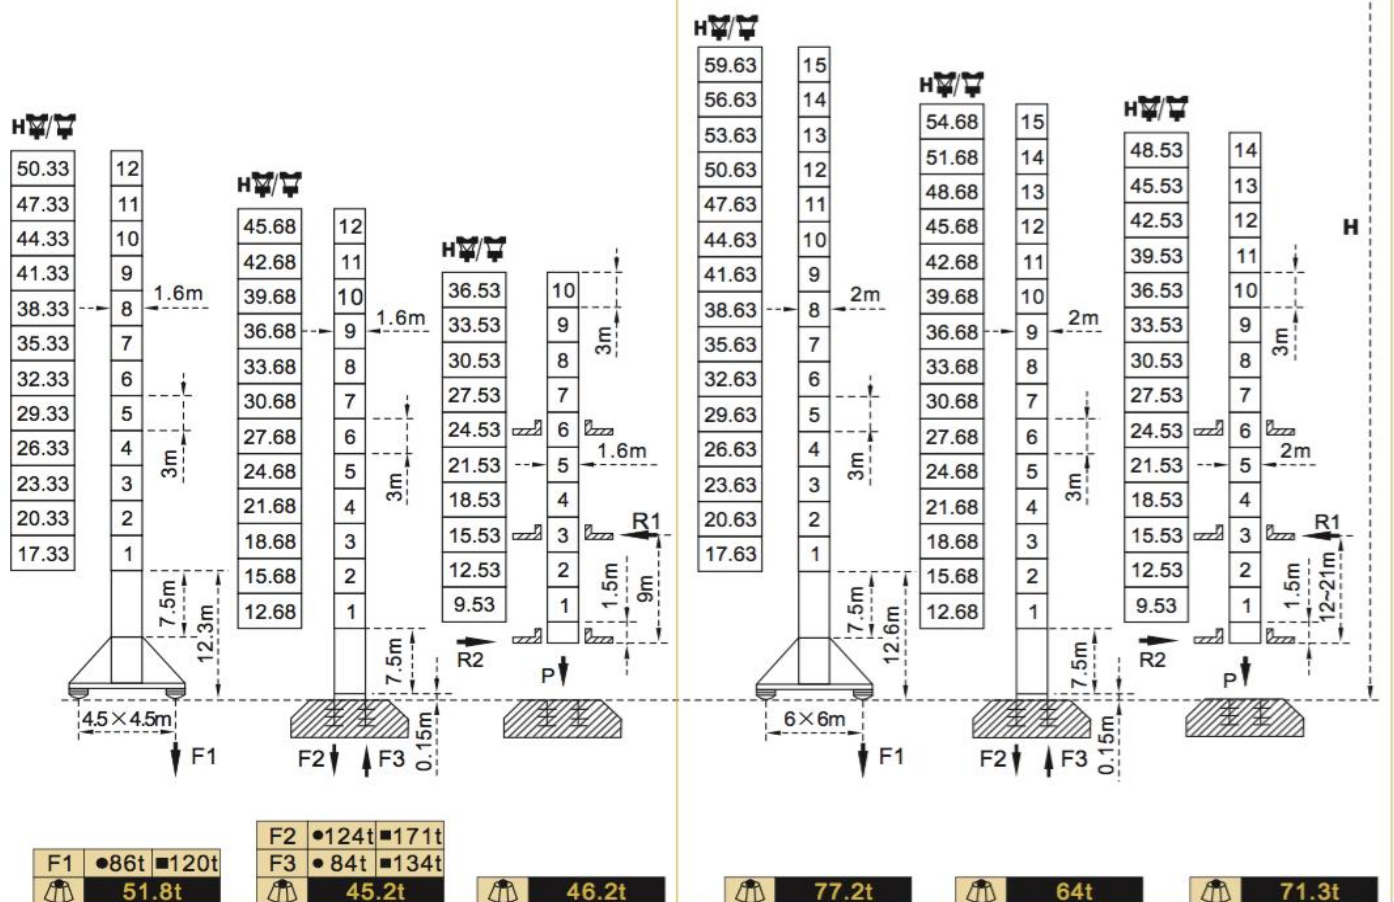


● in service ■ out of service
 Without load and ballast with longest jib and maximum height

F = Reactions

Load diagrams

Jib

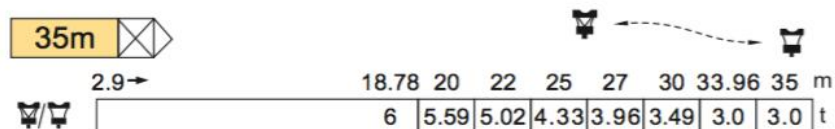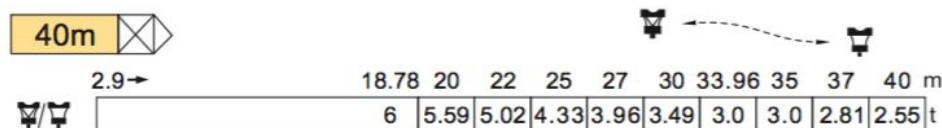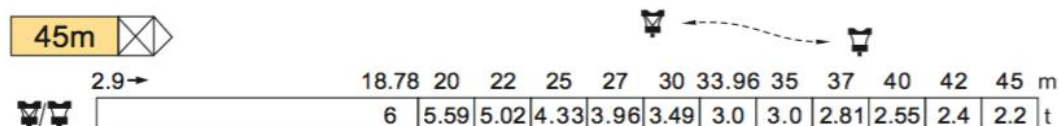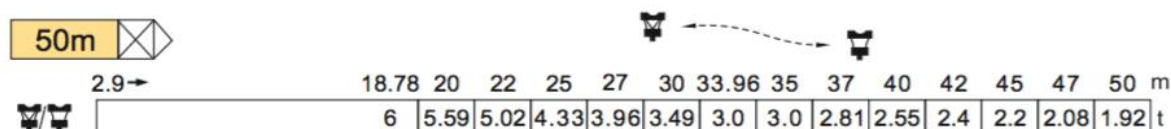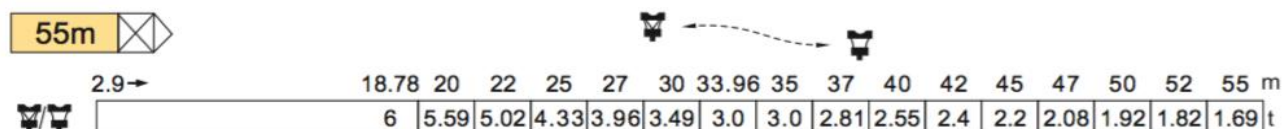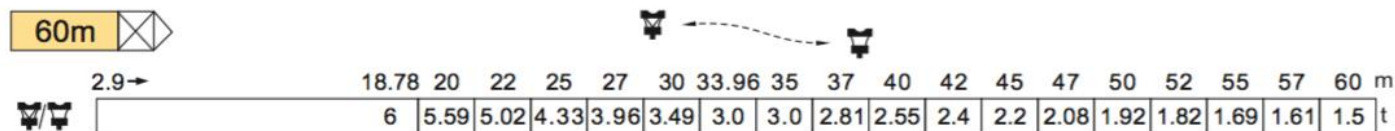

Standard trolley 2/4 fall (when using  subtract 0.66t from the loads )

Specifications Mechanisms

Mechanisms	Motor Type	Speeds m/min		Capacity t.	Rope Lenght	Motor kW
Hoisting	33RPC15D 	2 fall	0-40	3	500m >500m ★	24
			0-80	1.5		
		4 fall	0-20	6		
			0-40	3		
	33LVF15B 	2 fall	0-40	3	500m >500m ★	24
			0-80	1.5		
		4 fall	0-20	6		
			0-40	3		
Trolleying	XD96L 	0-58				95N.m
Slewing	RCV95 	0-0.7r/min				2 × 95N.m
Travelling	RT443 	0-12.5-25				4 × 1.7/3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally binding.
For any technical information, please refer to
the corresponding instructions.

