




STT 5015-8


Experts in the field



Outline Dimensions





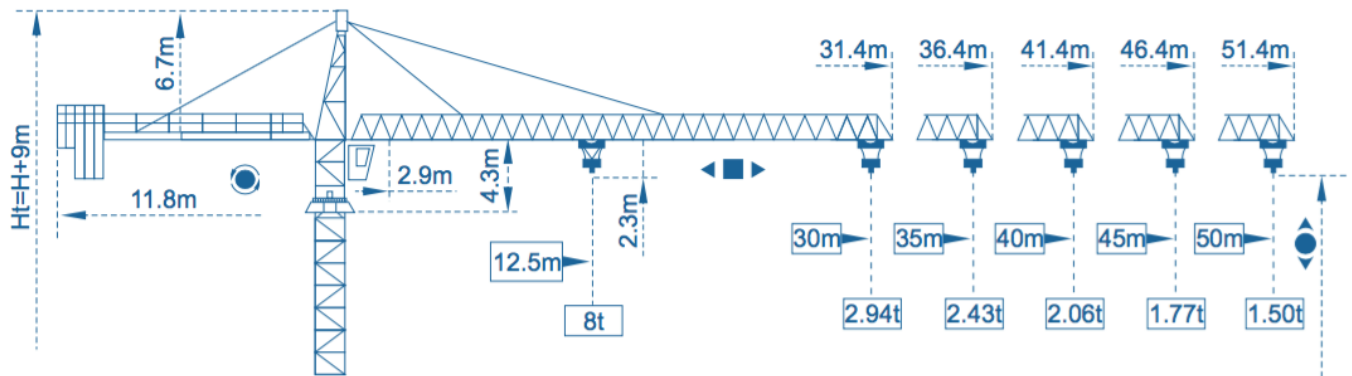


Mast $\square 1.6m \times 1.6m$

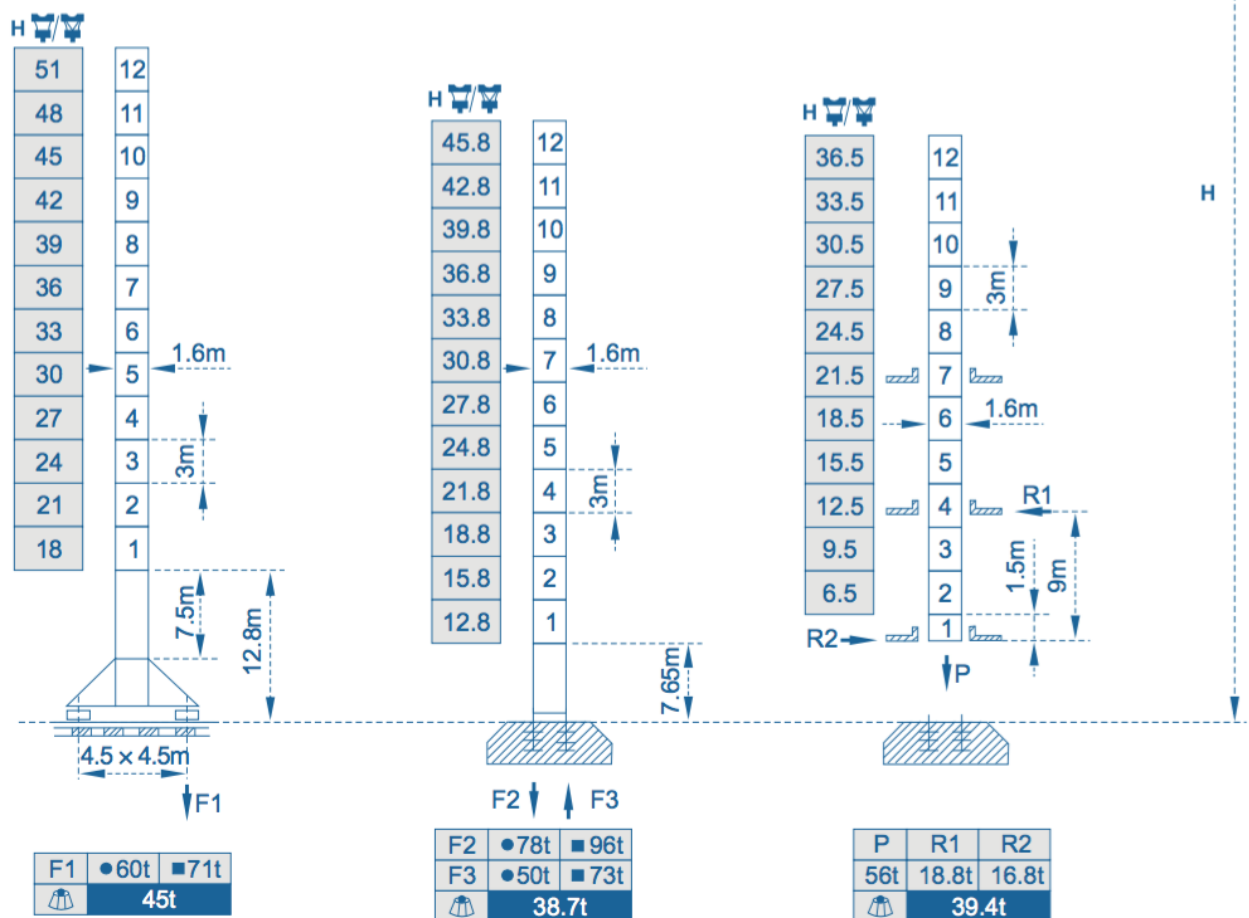

Load diagrams

Jib

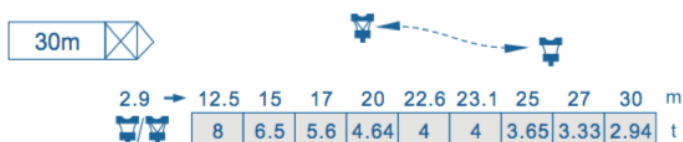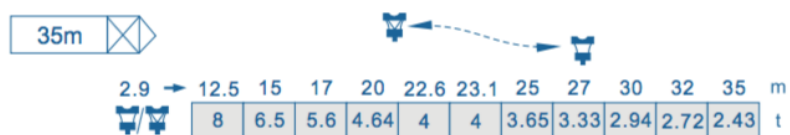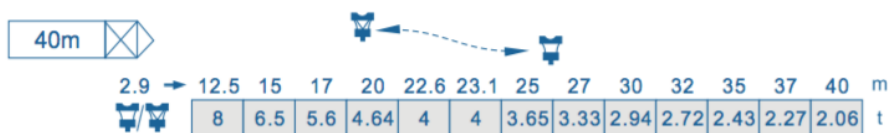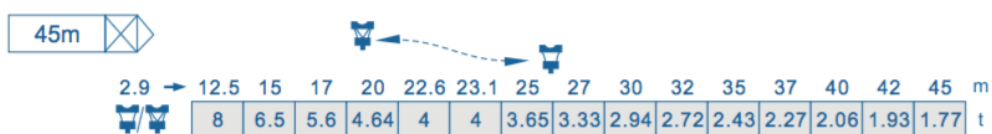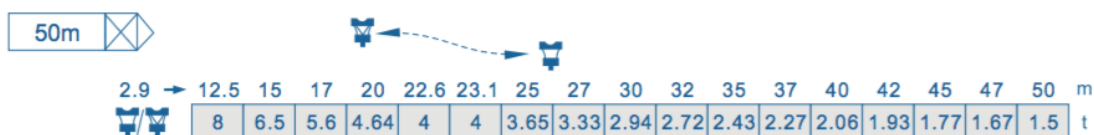

Standard trolley 2/4 fall (when using  subtract 0.1 t from the loads )

Specifications Mechanisms						
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght	Motor kW
Hoisting	40LVF20 ⬆️⬆️	2 fall	0-37.5	4	460m >460m★	30
			0-75	2		
		4 fall	0-18.75	8		
			0-37.5	4		
	50LVF20 ⬆️⬆️	2 fall	0-41	4	460m >460m★	37
			0-82	2		
		4 fall	0-20.5	8		
			0-41	4		
	60LVF20 ⬆️⬆️	2 fall	0-50	4	550m >550m★	45
			0-100	2		
		4 fall	0-25	8		
			0-50	4		
	40RPC20B ⬆️⬆️	2 fall	0-37.5	4	460m >460m★	30
			0-75	2		
		4 fall	0-18.75	8		
			0-37.5	4		
45RCS20 ⬆️⬆️	2 fall	0-40	4	478m >478m★	33	
		0-80	2			
	4 fall	0-20	8			
		0-40	4			
Trolleying	XD96 ⬅️▪️▪️➡️	0-58				95N.m
	6DCV ⬅️▪️▪️➡️	0-58				5
Slewing	OMD45 ⦿	0-0.7 r/min				2X4.4
	RCV95 ⦿	0-0.7 r/min				2X95 N.m
Travelling	RT433 ⬅️⬆️➡️	0-12.5-25				2X2.6/5.2

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

