




SLG 5032-12

Experts in the field

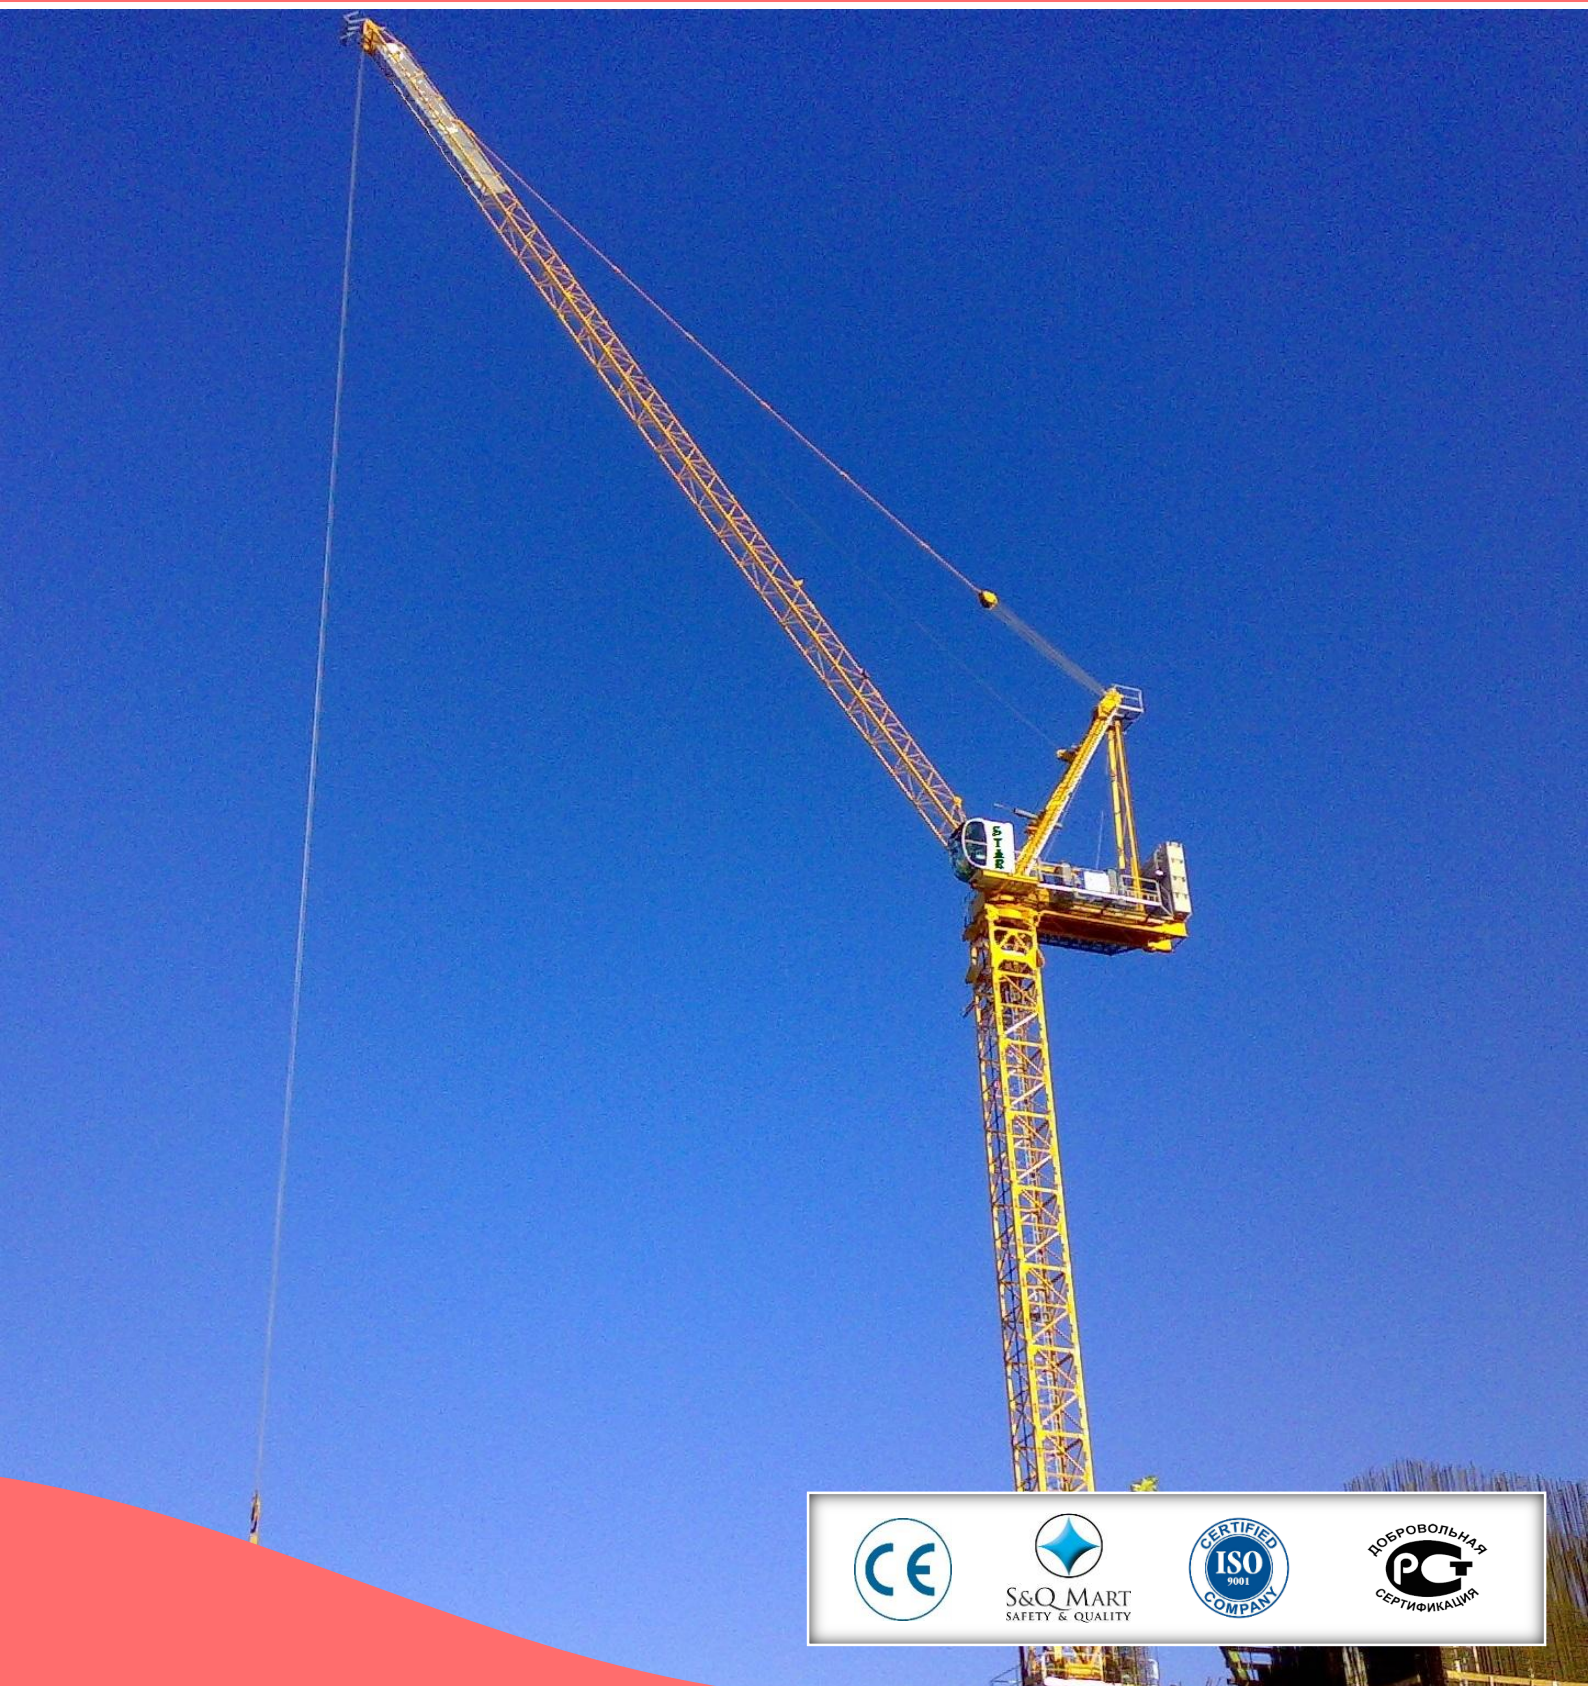


S&Q MART
SAFETY & QUALITY



ДОБРОВОЛЬНАЯ
СЕРТИФИКАЦИЯ

Mast ∇ 2m x 2m

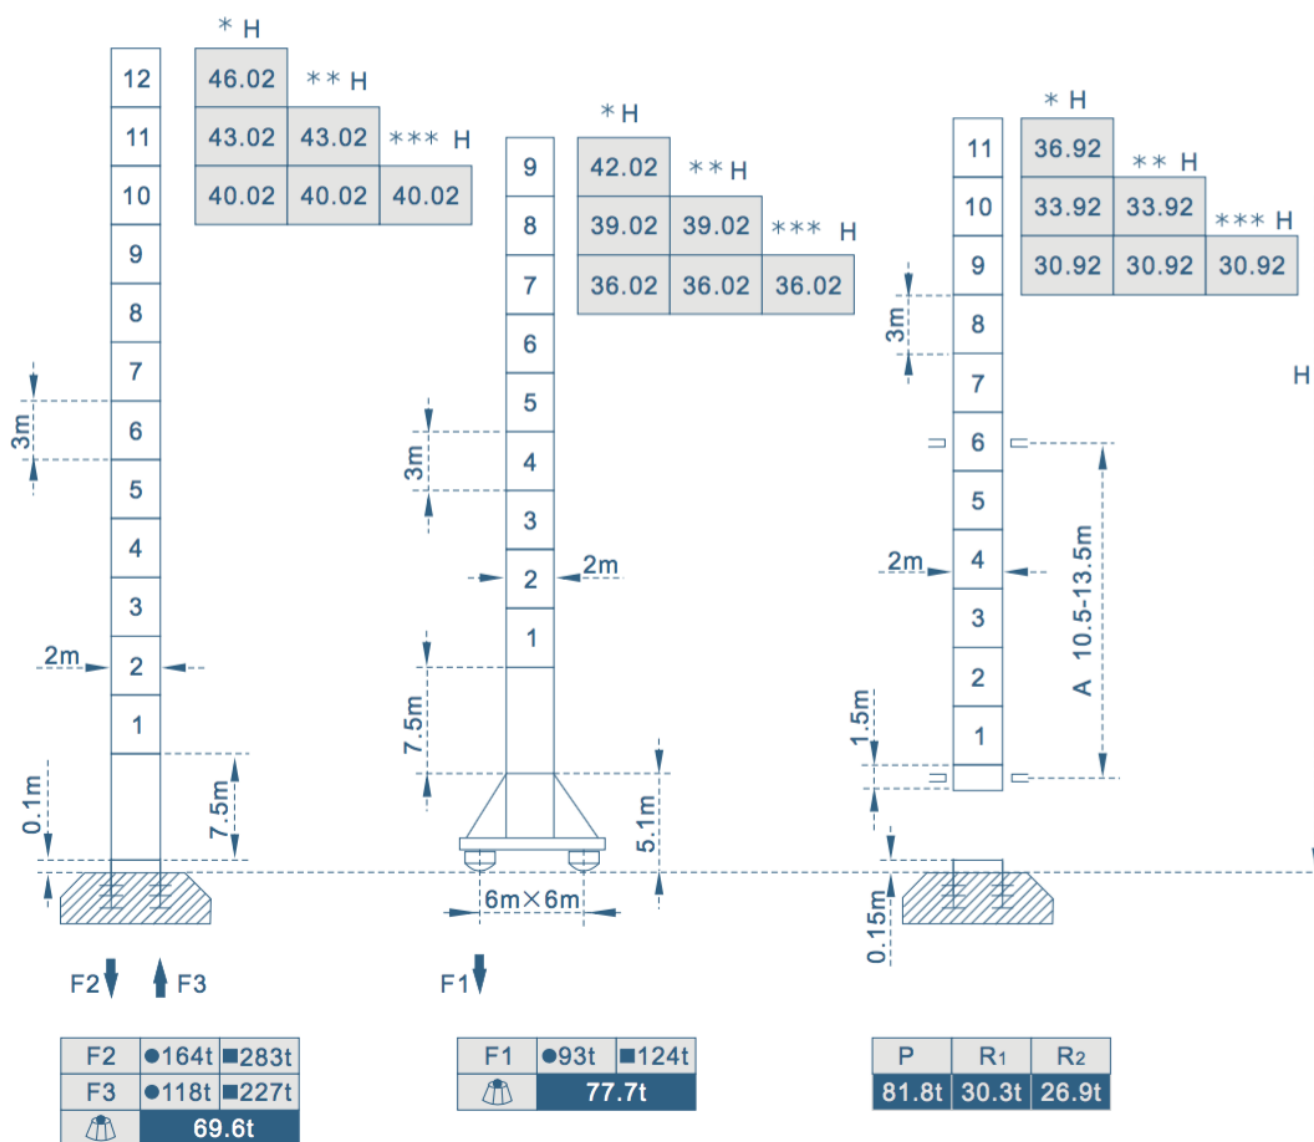


F= Reactions

- In service
- Out of service
- ⚙ Without load and ballast with longest jib and maximum height


H (m)

JIB * 30-35m ** 40-45m *** 50m

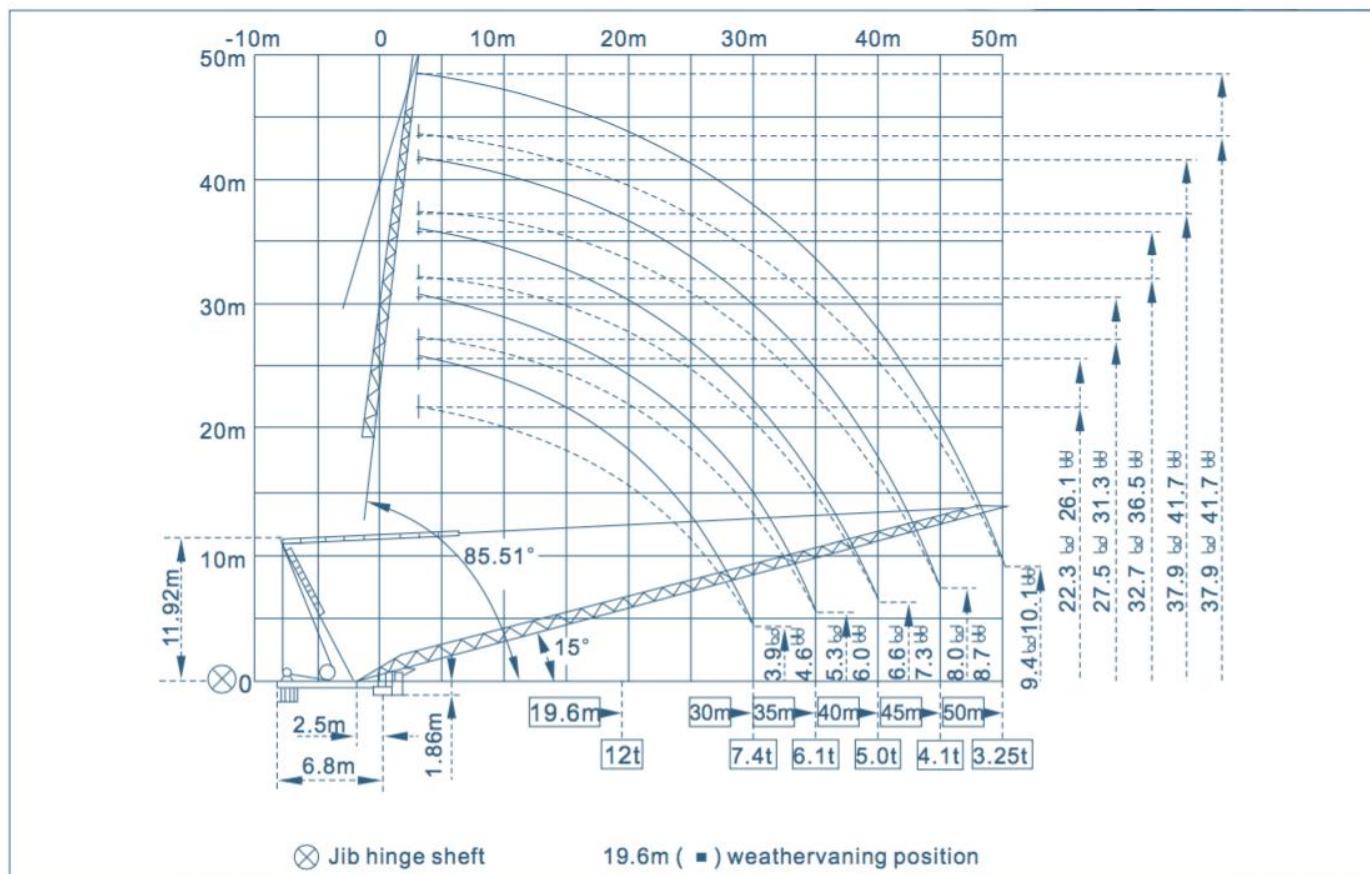

Jib

Load diagrams

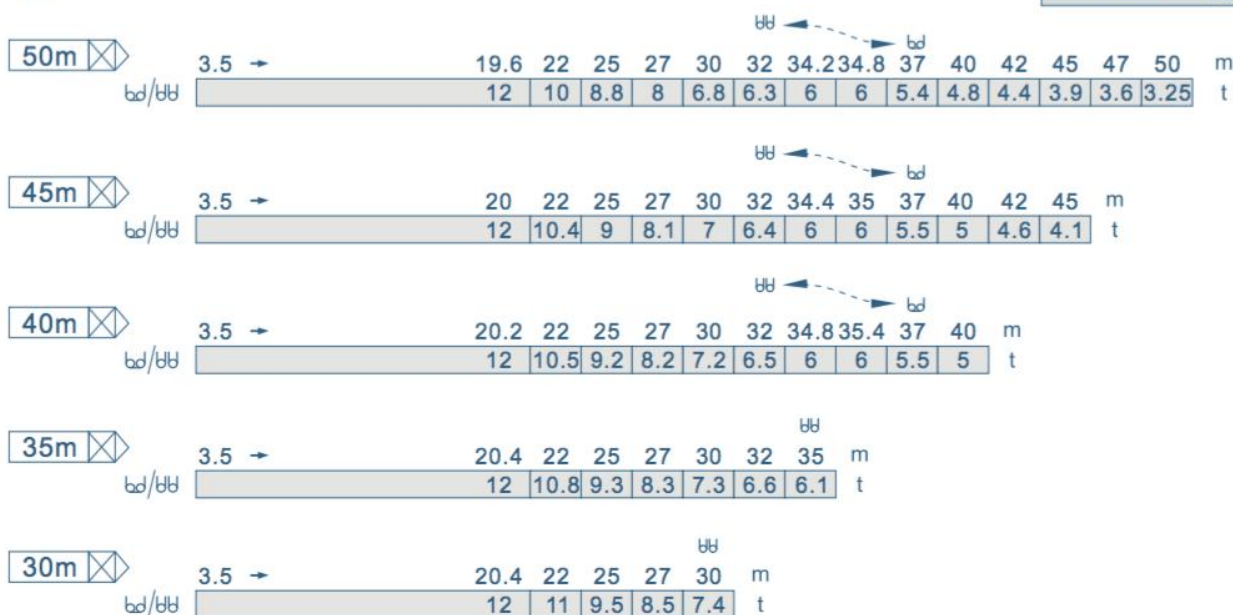

Specifications Mechanisms						
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght	Motor kW
Hoisting	75LVF30R 	2 fall	0-40	6	570m >570m★	55
			0-86	3		
		4 fall	0-20	12		
			0-43	6		
	70RCS30 	2 fall	0-40	6	570m >570m★	51.5
			0-80	3		
		4 fall	0-20	12		
			0-40	6		
Trolleying	40BWZD 	≤3.0min				30
	60DVF40 	≤3.0min				45
Slewing	RCV120 	0-0.7r/min				2×120N.m
	16RVF 	0-0.7r/min				2×6
Travelling	RT443 	0-12.5-25				4X1.7/3.4
	18TVF 	0-25				4X3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

