




STT 6024-12


Experts in the field



Outline Dimensions





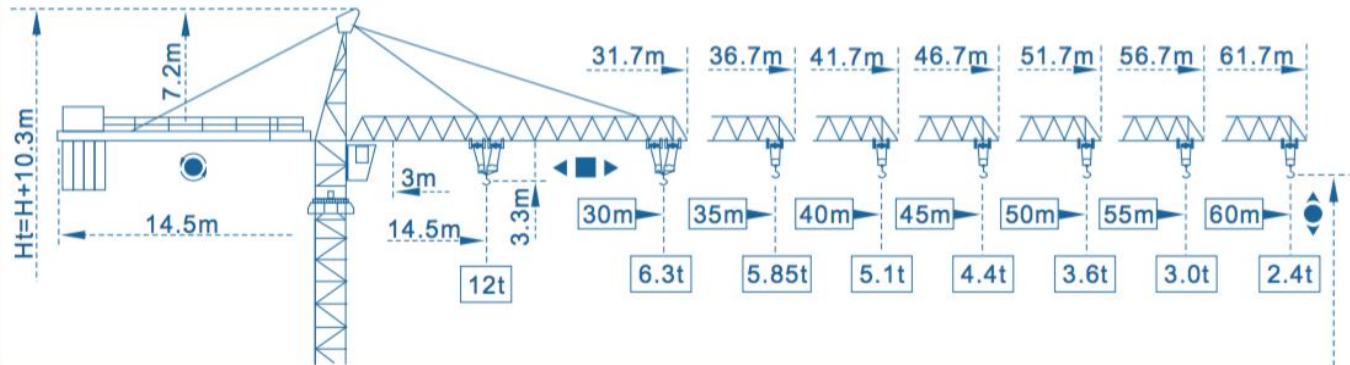


Mast 2m x 2m

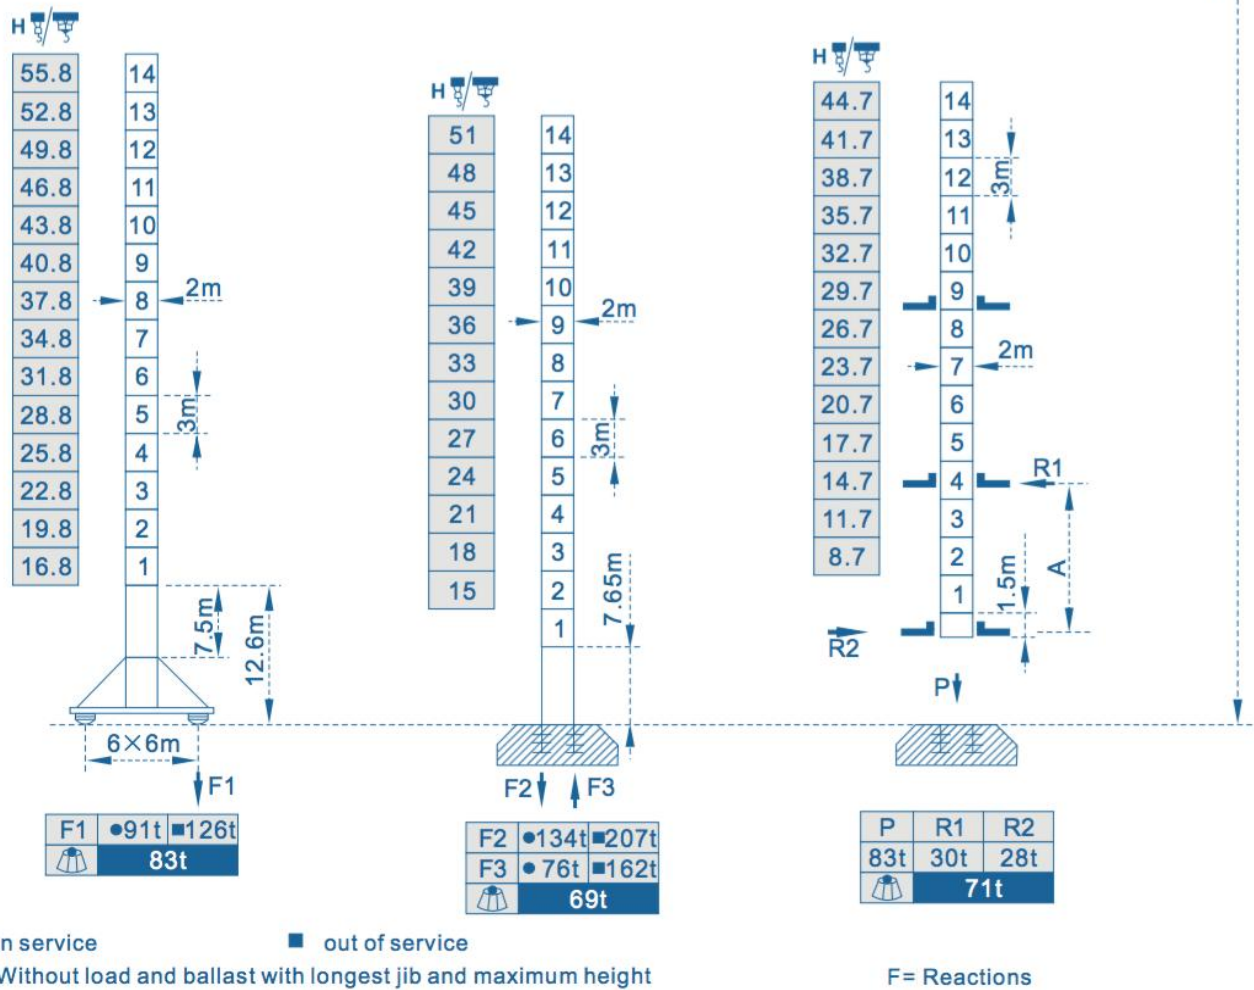

Load diagrams

Jib

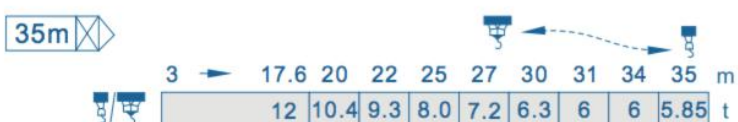

Standard trolley 2/4 fall (when using  subtract 0.7t from the loads )

Specifications Mechanisms						
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght	Motor kW
Hoisting	75LVF30R ⬆️⬆️	2 fall	0-40	6	570m >570m★	55
			0-86	3		
		4 fall	0-20	12		
			0-43	6		
	102LVF30F ⬆️⬆️	2 fall	0-50	6	1000m >1000m★	75
			0-100	3		
		4 fall	0-25	12		
			0-50	6		
	120LVF30F ⬆️⬆️	2 fall	0-65	6	900m >900m ★	90
			0-130	3		
			0-260	1.5		
		4 fall	0-32.5	12		
			0-65	6		
			0-130	3		
	70RCS30 ⬆️⬆️	2 fall	0-40	6	570m >570m★	51.5
			0-80	3		
4 fall		0-20	12			
		0-40	6			
Trolleying	XD96L ⬅️■➡️	0-58				95N.m
	6DVFL ⬅️■➡️	0-58				95N.m
Slewing	RCV120 ⦿	0-0.7 r/min				2×120N.m
	16RVF ⦿	0-0.7 r/min				2×6
Travelling	RT443 ⬅️●➡️	0-12.5-25				4×1.7/3.4
	18TVF ⬅️●➡️	0-25				4×3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

