




STS 5010-4

Experts in the field




Outline Dimensions

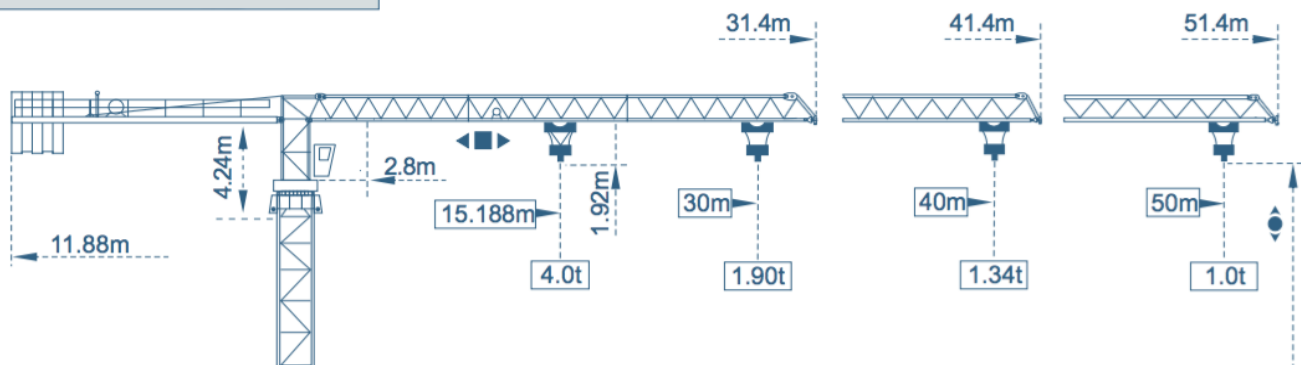

Mast ∇ 1.4m x 1.4m

∇ 1.6m x 1.6m

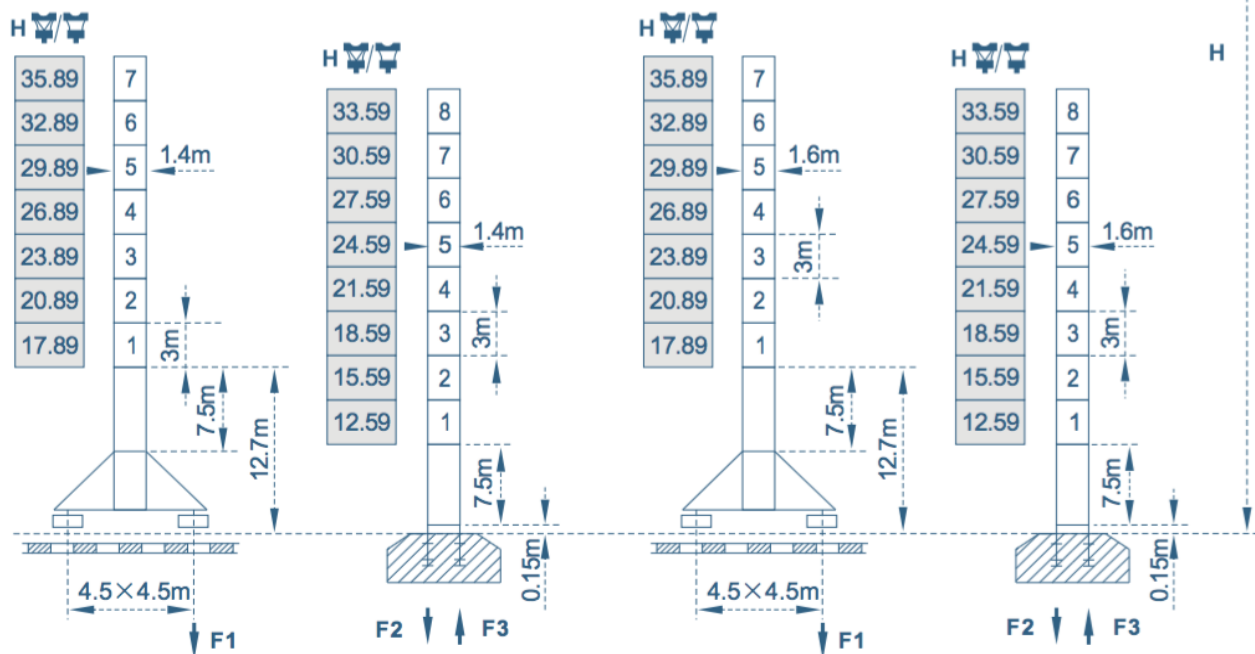

F= Reactions


Specific parameters, see the product manual

* Independent height increased to consult us


Load diagrams

Jib


50m

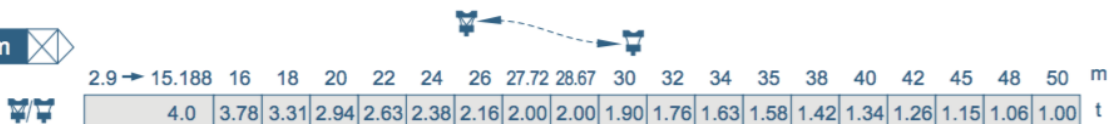

40m

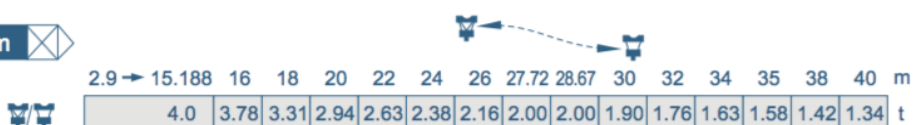

30m

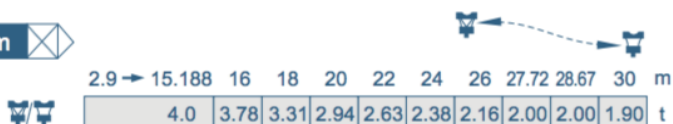


Standard trolley 2/4 fall (when using subtract 0.04t from the loads)


Mast $\varnothing 1.4\text{m} \times 1.4\text{m}$

$\varnothing 1.6\text{m} \times 1.6\text{m}$

H

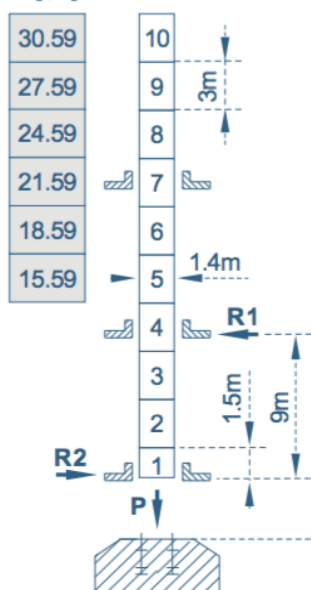

H

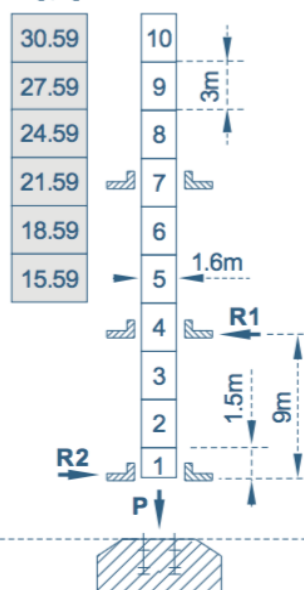

Specifications Mechanisms					
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght
Hoisting	25LVF10 	2 fall	0-47	2	255m >255m ★
			0-94	1	
		4 fall	0-23.5	4	
			0-47	2	
	25PC10 	2 fall	0-45	2	265m >265m ★
			0-90	1	
		4 fall	0-22.5	4	
			0-45	2	
	33RPC20 	2 fall	0-30	4	385m >385m ★
			0-60	2	
Trolleying	XD55 	15-38-58			55N.m
	4DCV 	0-58			3.3
	4D2V4 	20/40			2.2/3.3
Slewing	OMD45 	0-0.7r/min			2×4.4
	RCV95 	0-0.7r/min			2×95N.m
	RCV120A 	0-0.7r/min			120N.m
Travelling	RT 	0-12.5-25			2×1.7/3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

