




STT 80215-80


Experts in the field



Outline Dimensions

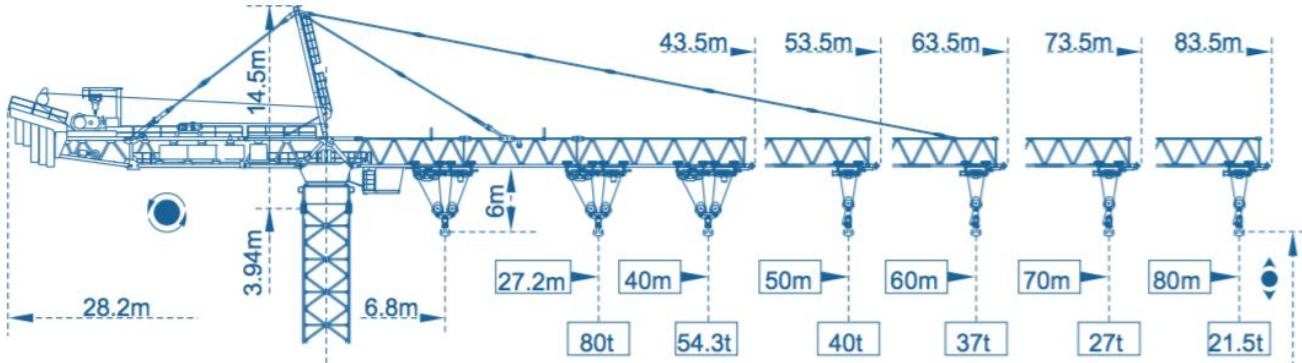

Mast ∇ 5.5m x 5.5m

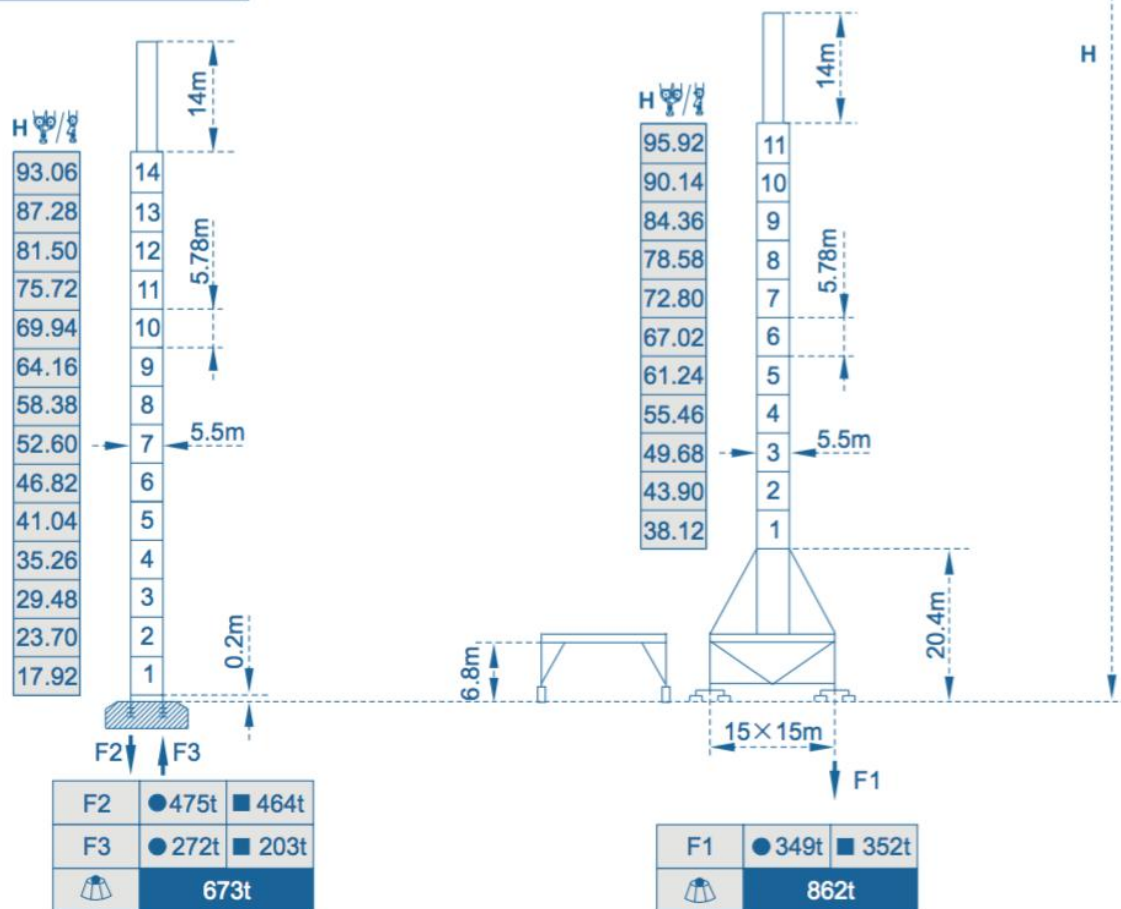


● In service ■ Out of service
 Without load and ballast with longest jib and maximum height

F = Reactions


Load diagrams

Jib


80m

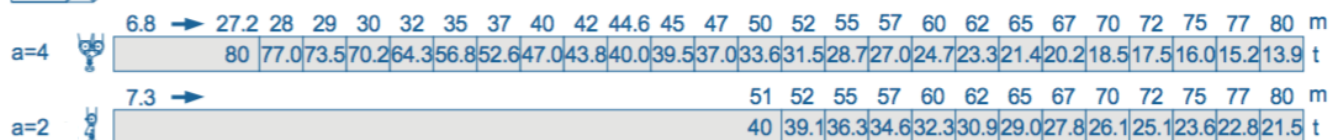


70m

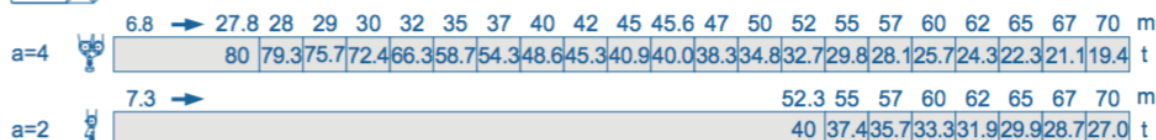


60m

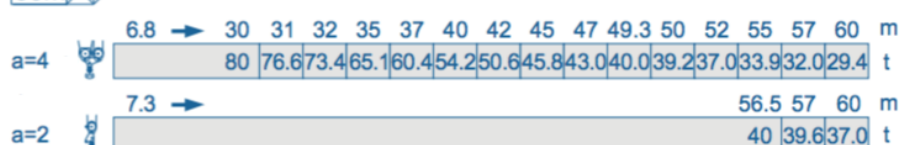

50m

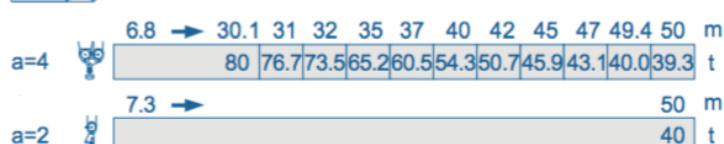

40m

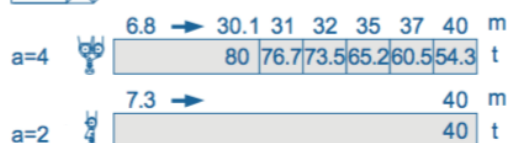

Specifications Mechanisms						
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght	Motor kW
Hoisting	300LVF200 	2 fall	0-27	40	800m >800m★	220
			0-40	30		
			0-50	20		
		4 fall	0-13.5	80		
			0-20	60		
			0-25	40		
Trolleying	60DVF45 	0-80				45
Slewing	150RVF 	0-0.55r/min				6×18.4
Travelling	93TVF 	0-16				20×3.4
Power Supply	380V 50Hz 630kVA					

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

