




SLG 6058-32


Experts in the field

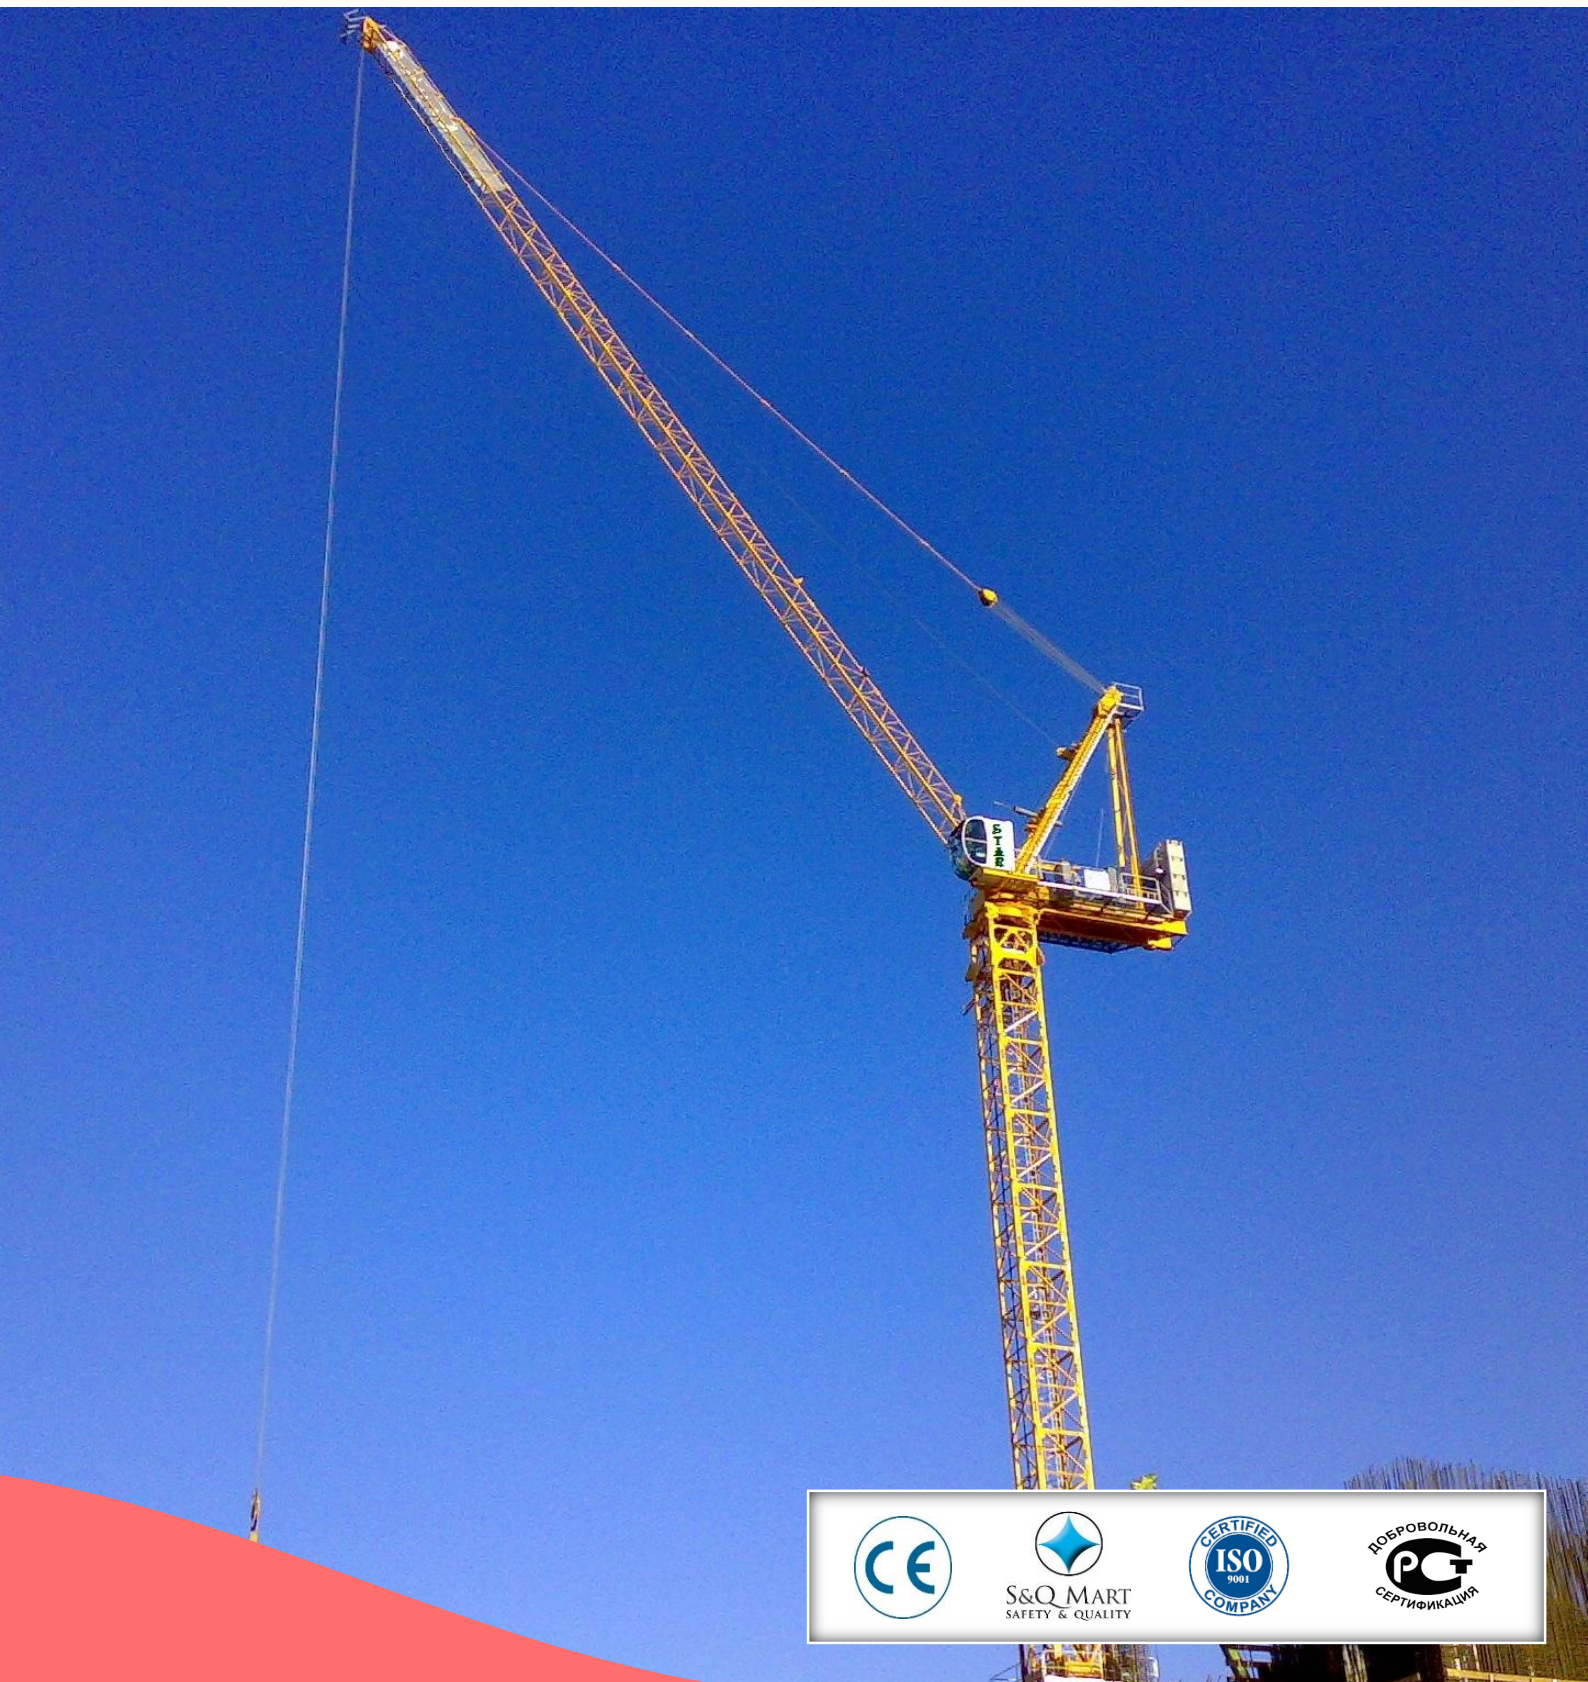

S&Q MART
SAFETY & QUALITY




Outline Dimensions

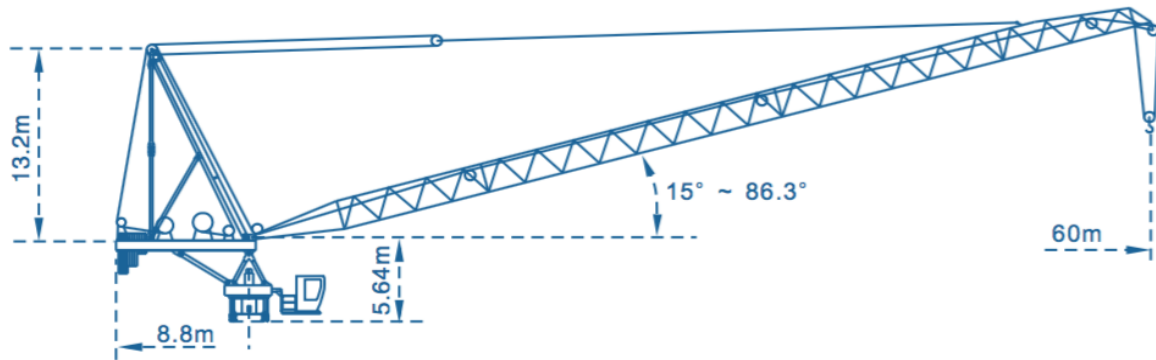

Mast 4m x 4m

2m x 2m

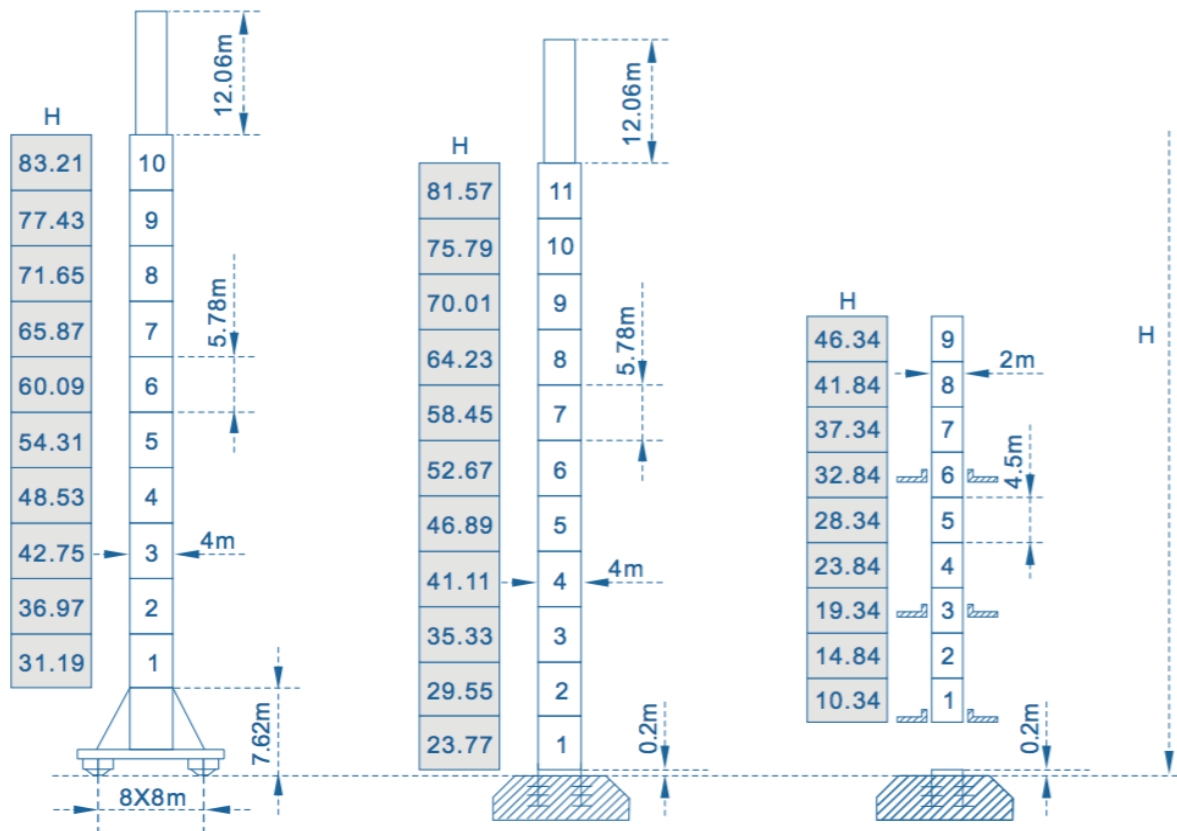

H (m)

JIB 60m

32t Load Diagrams

60m

5.6 →				29	30	33	35	38	40	43	45	48	50	53	55	58	60	m
⤵				20	18.8	16.5	15.1	13.2	12.1	10.7	9.8	8.7	8	7.1	6.6	5.9	5.5	t
5.9 →						34	35	38	40	43	45	48	50	53	55	58	60	m
⤵						16	15.4	13.5	12.4	11	10.1	9	8.3	7.4	6.9	6.2	5.8	t

55m

5.6 →				25.3	28	30	33	35	38	40	43	45	48	50	53	55	m
⤵				24	21.4	19.6	17.2	15.7	13.9	12.8	11.3	10.5	9.3	8.6	7.7	7.2	t
5.9 →								35	38	40	43	45	48	50	53	55	m
⤵								16	14.2	13.1	11.6	10.8	9.6	8.9	8	7.5	t

50m

5.6 →	19.7	20	23	25	28	30	33	35	38	40	43	45	48	50	m
⤵	32	31.4	26.4	24.2	21.5	19.8	17.4	16	14.3	13.2	11.6	10.8	9.6	9	t
5.9 →								35.6	38	40	43	45	48	50	m
⤵								16	14.6	13.5	11.9	11.1	9.9	9.3	t

45m

5.6 →	20.1	23	25	28	30	33	35	38	40	43	45	m
⤵	32	26.8	24.6	21.9	20.1	17.7	16.3	14.7	13.6	12.0	11.2	t
5.9 →							36.4	38	40	43	45	m
⤵							16	15	13.9	12.3	11.5	t

40m

5.6 →	20.3	23	25	28	30	33	35	38	40	m
⤵	32	27	24.8	22	20.2	17.8	16.4	14.8	13.7	t
5.9 →							36.6	38	40	m
⤵							16	15.1	14	t

35m

5.6 →	20.4	23	25	28	30	33	35	m
⤵	32	27.3	25	22.2	20.4	18	16.6	t
5.9 →							35	m
⤵							16	t

30m

5.6 →	20.4	23	25	28	30	m
⤵	32	27.7	25.3	22.4	20.6	t
5.9 →					30	m
⤵					16	t

Any special requirement please contact us freely

Specifications Mechanisms

Specifications Mechanisms						
Mechanisms	Motor type	Speeds m/min		Capacity t.	Rope lenght	Motor kW
Hoisting 	217LVF160 32t	1 fall	0—40	16	450m >450m★	160
			0—80	8		
		2 fall	0—20	32		
			0—40	16		
Trolleying 	150BVF80	≥2. 6min				110
Slewing 	RCV145	0-0.7 r/min				3 × 145N.m
Travelling 	37TVF	0-8.5-17				8 × 1. 7/3.4

★ To be supplied according to client's specific requirements

This commercial documents is not legally bindig.
For any technical information, please refer to
the corresponding instructions.

